


INSTRUMENT  
APPROACH  
CHART-ICAO


AERODROME ELEV. 4404 FT  
HEIGHTS RELATED TO  
THR RWY 32 ELEV. 4404 FT

INFO 118.800  
121.600  
ATIS 126.050

ILAM  
ILS Z RWY 32  
CAT A/B/C/D

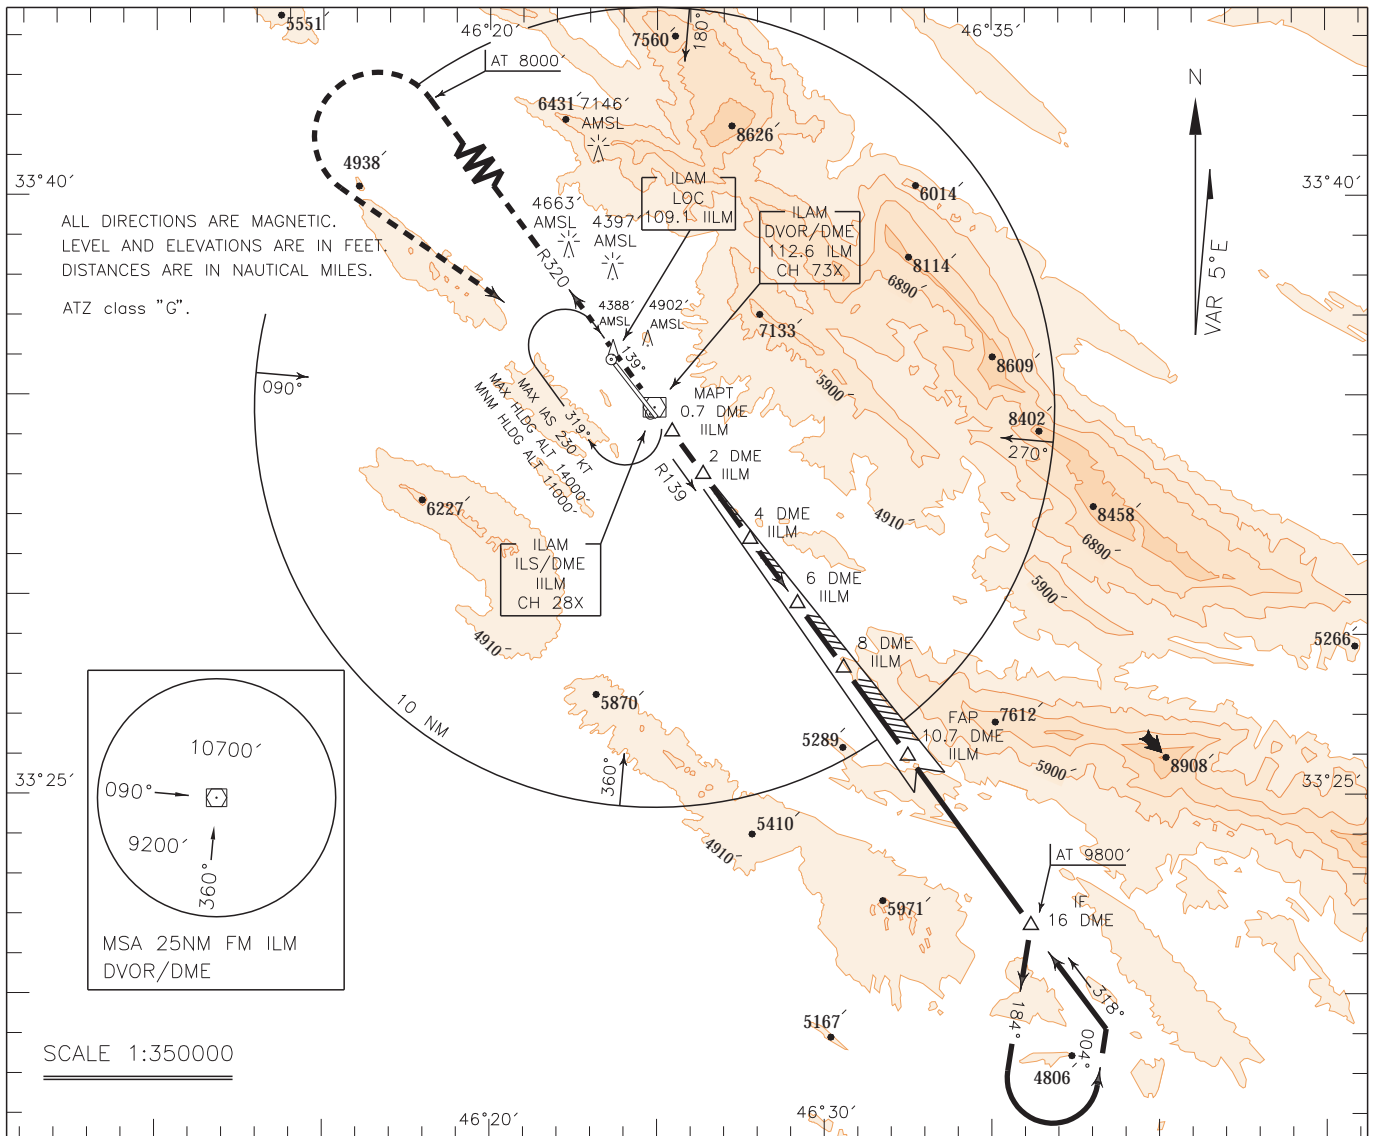

ALL DIRECTIONS ARE MAGNETIC.  
LEVEL AND ELEVATIONS ARE IN FEET.  
DISTANCES ARE IN NAUTICAL MILES.  
ATZ class "G".




SCALE 1:350000

MISSED APPROACH: At 0.7 ILS/DME climb on RDL 320 to 8000 FT, then turn left to rejoin HLDG.

NOTE:

- 1-MNM rate of climb during missed APCH 245 FT/NM.
- 2-MAX IAS during missed APCH 185 KT.
- 3-Turn below 8000 FT not authorized.

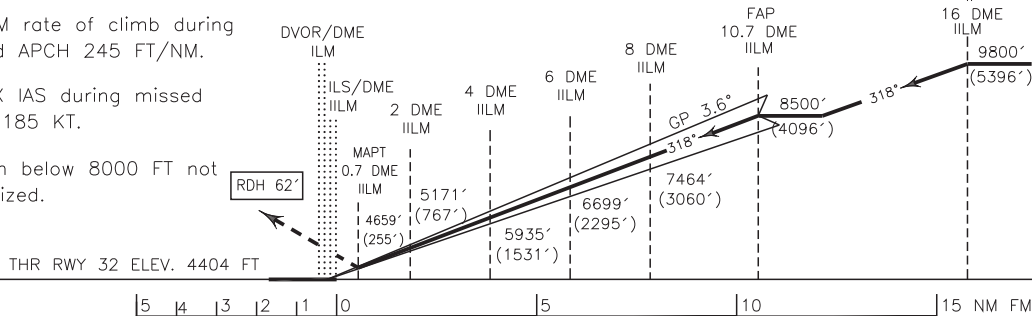

TRL FL 160  
TA 14000'

NOTE:

- 1-Circling not authorized for CAT C and D BTN RDL 335 and RDL 115 clockwise direction.
- 2-Contour intervals are to be selected at 990 FT.

OCA(H)		A	B	C	D
Straight-in Approach	CAT I	4659' (255')			
	LOC (GP INOP)				
Circling		5920' (1516')	6250' (1846')	6600' (2196')	