

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO

TRANSITION ALTITUDE
5000 FT

APP 119.700
TWR 122.500, 121.900
ATIS 126.200



BUSHEHR
RWY 31R/L, 13L/R
KUGVU 2C/1E

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.

CTR above FL200 class "A",
at FL 200 and below class "D".
ATZ class "D".



NOT TO SCALE

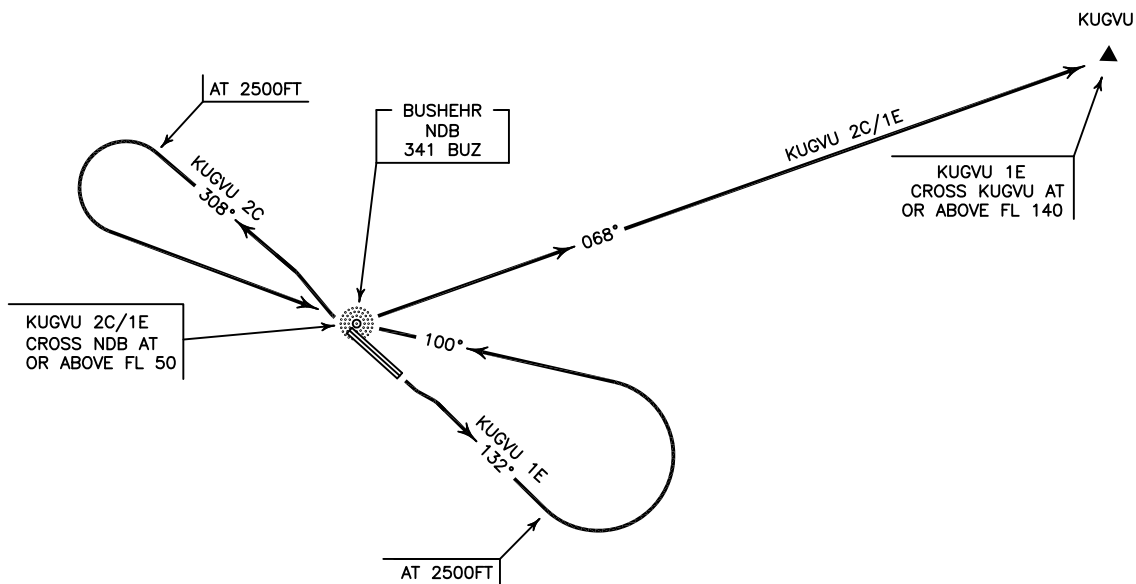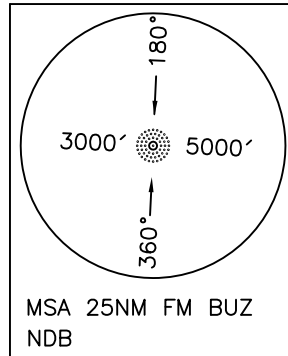

KUGVU 2C DEP:

DEP RWY 31R/L - After take off climb on BRG 308° to 2500 FT, then turn left to cross overhead NDB at or above FL 50, then intercept BRG 068° to cross KUGVU at or above FL 140 and climb to cleared level.

NOTE: This procedure is unusable when OID30 is active.

KUGVU 1E DEP:

DEP RWY 13L/R - After take off climb on BRG 132° to 2500 FT, then turn left to intercept BRG 100° to cross overhead NDB at or above FL 50, then intercept BRG 068° to cross KUGVU at or above FL 140 and climb to cleared level.

NOTE: This procedure is unusable when OID30 is active.