

AERODROME CHART - ICAO

KISH ISLAND/KISH

**Scale 1 : 15000**

VAR 3°E

**Aerodrome Elevation : 99 FT**

| Aerodrome Lighting |         |                        |                        |
|--------------------|---------|------------------------|------------------------|
| RWY 09L            | RWY 27R | RWY 09R                | RWY 27L                |
| PALS               | PALS    | PALS Barrette (CAT II) | PALS Barrette (CAT II) |
| RTHL               | RTHL    | SFLS                   | SFLS                   |
| WBAR               | WBAR    | RTHL                   | RTHL                   |
| PAPI               | PAPI    | WBAR                   | WBAR                   |
| REDL               | REDL    | PAPI                   | PAPI                   |
| RENL               | RENL    | RTZL                   | RTZL                   |
| STWL               | STWL    | RCLL                   | RCLL                   |
|                    |         | REDL                   | REDL                   |
|                    |         | RENL                   | RENL                   |
|                    |         | STWL                   | STWL                   |

ABN : FLG White, Green  
Apron : INFO Not AVBL

**TWY Lighting**

Edge : All TWYs except TWY M  
Center Line : NIL

**ATS Communication Facilities**

| Service Designation | Frequency                 |
|---------------------|---------------------------|
| TWR                 | 118.450, 122.325, 121.675 |
| ATIS                | 128.000                   |
| -                   | -                         |

AD Reference Code : 4F

Displaced Threshold  
NIL


VOR check point : NIL

**TWY**  
Width : TWY A, A1, A2, A4, A5, A6, A7 and A8 are 30 M, TWY B2, B3, B4 and B7 are 23 M, TWY B1 and B8 are 45 M, TWY C4 and C5 are 30 M.  
Surface : Asphalt  
Strength (PCN) : 65/F/B/X/T

**Apron**  
Surface : Asphalt , Concrete  
Strength (PCN) : Asphalt : 65/F/B/X/T , Concrete : 65/F/B/X/T  
Dimensions : Apron 1 : 624 x 234 M, Apron 2 : 673 x 104 M

| RWY | Direction | Elevation | THR Coordinates        | GUND    | Bearing Strength (PCN) and Surface |
|-----|-----------|-----------|------------------------|---------|------------------------------------|
| 09L | 094.89°   | 94 FT     | 263146.35N 0535746.07E | - 95 FT | 65/F/B/X/T Asphalt                 |
| 27R | 274.90°   | 99 FT     | 263136.30N 0535957.41E | - 95 FT | 65/F/B/X/T Asphalt                 |
| 09R | 093.54°   | 92 FT     | 263136.43N 0535744.97E | - 95 FT | 560/F/A/X/T Asphalt                |
| 27L | 273.54°   | 95 FT     | 263126.33N 0535956.68E | - 95 FT | 560/F/A/X/T Asphalt                |

Hotspot : NIL

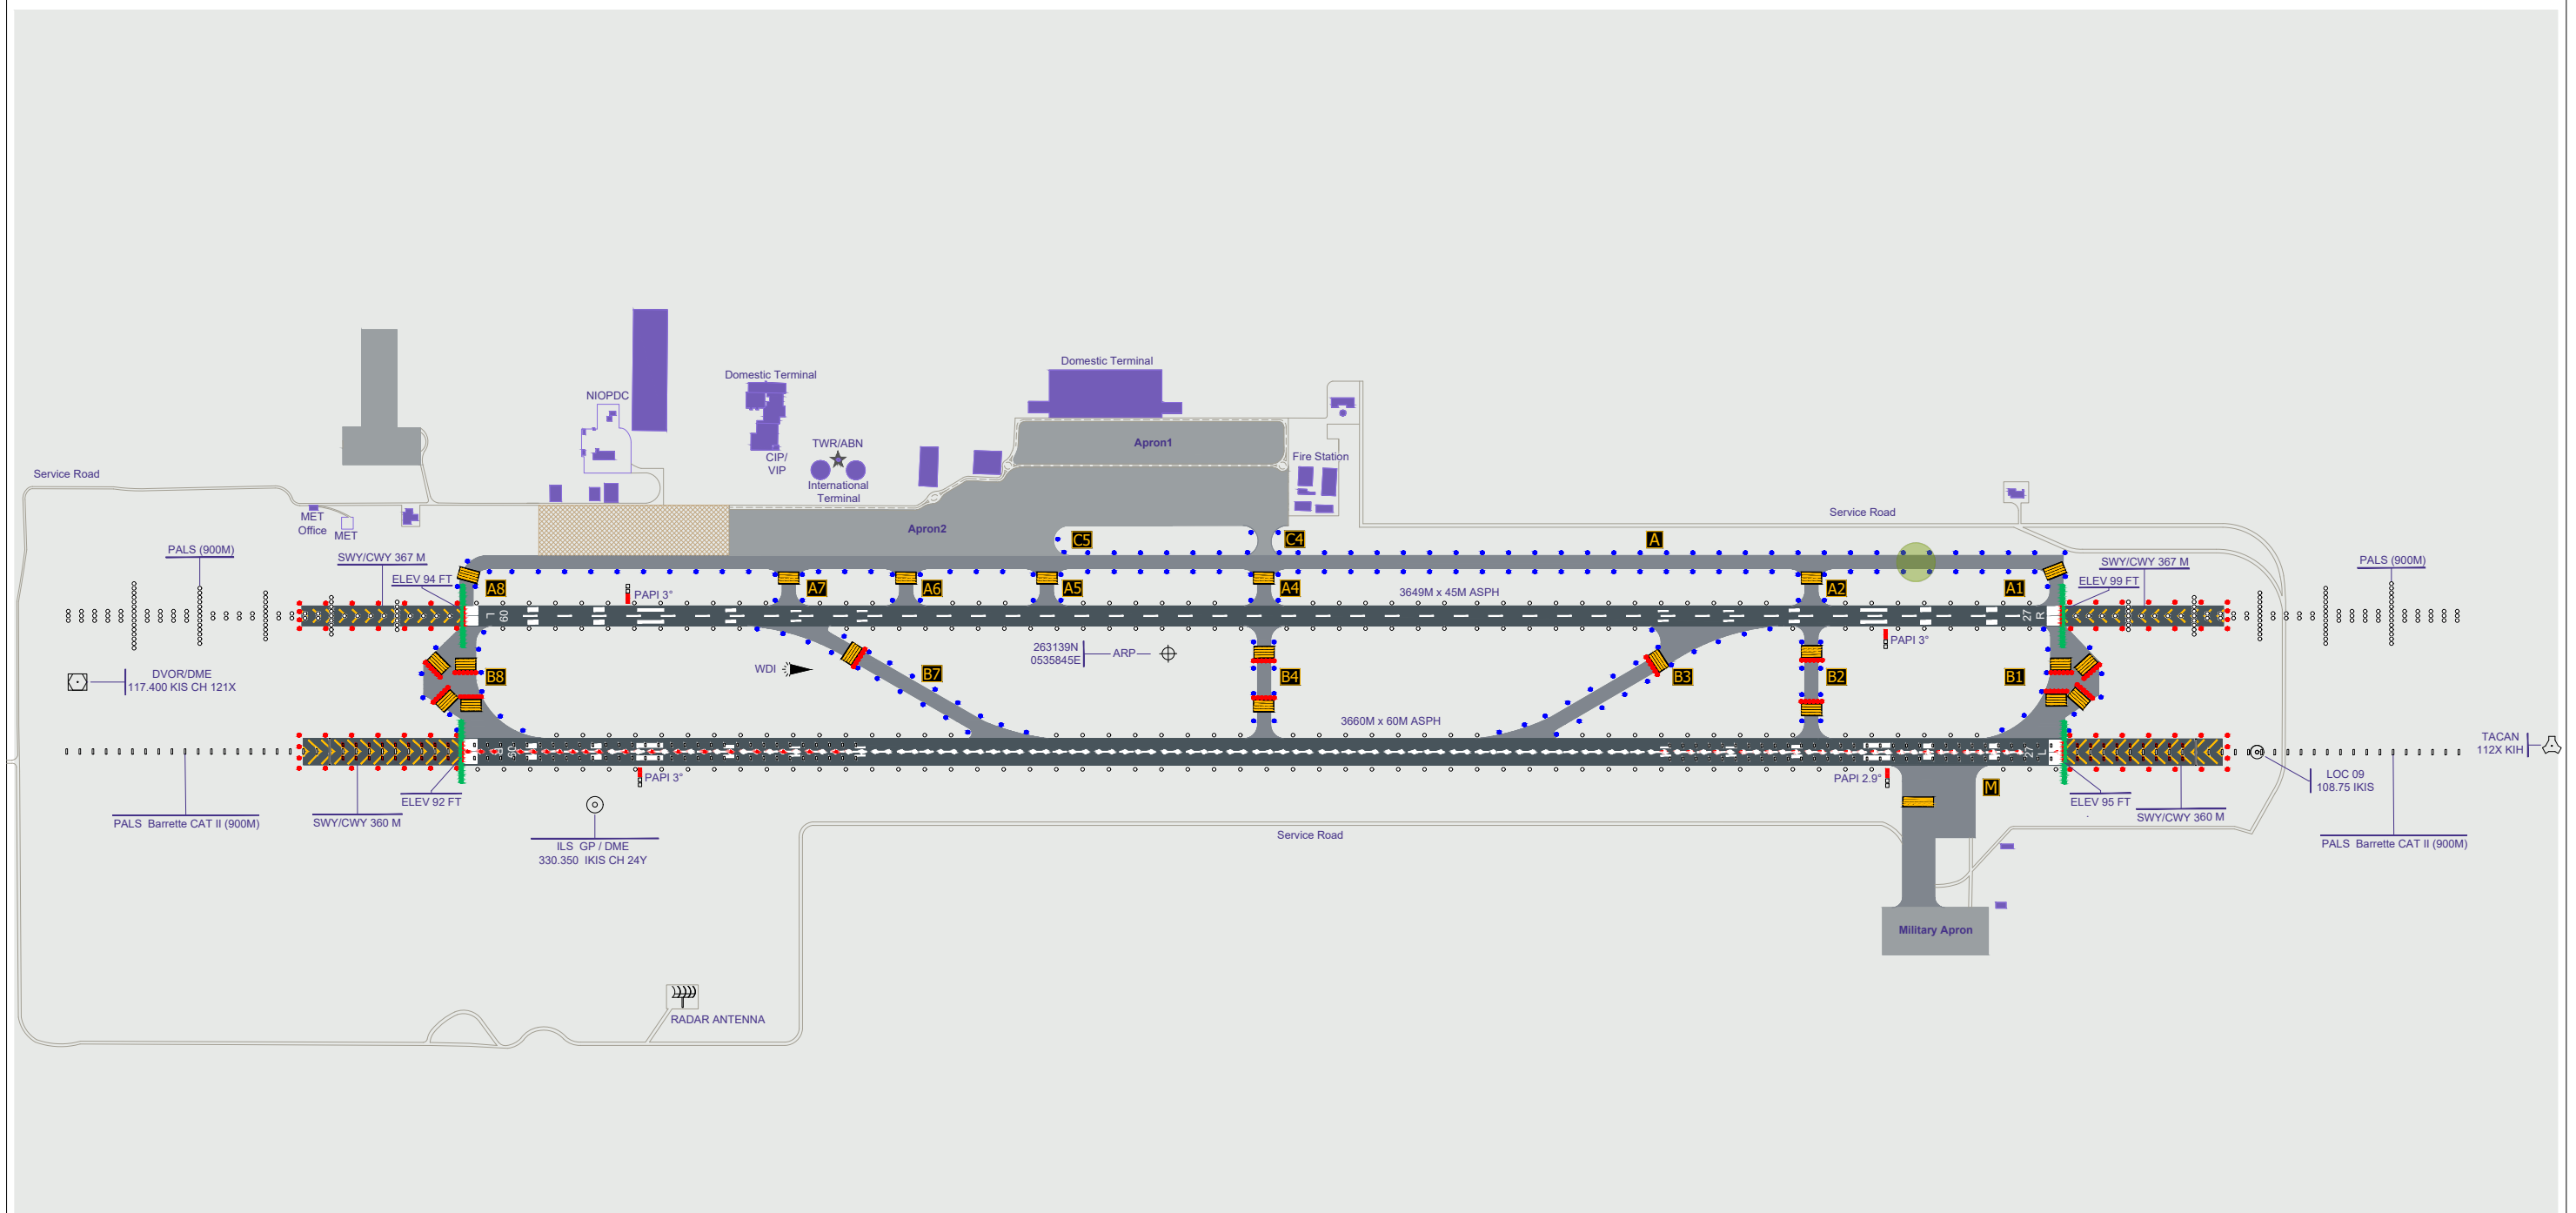

**INTENTIONALLY LEFT BLANK**