

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO


TRANSITION ALTITUDE
7000 FT

TWR 118.450, 122.325
121.675
ATIS 128.000

KISH ISLAND/KISH
RWY 09L/R, 27L/R
DELBU 1E/1F/1G/1H
IBNUX 1E/1G

ALL DIRECTIONS ARE MAGNETIC.
LEVEL AND ELEVATIONS ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.

CTR and ATZ class "D".

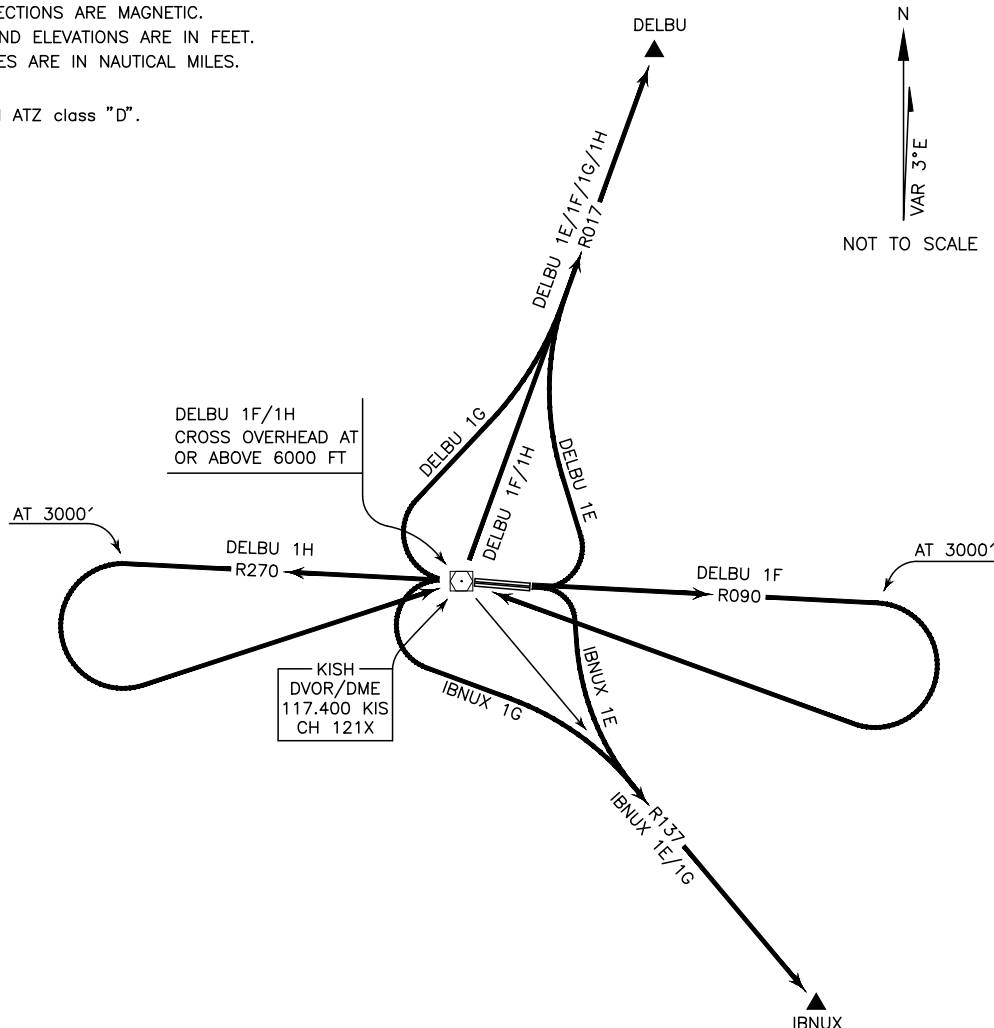

DELBU 1E DEP:

DEP RWY 09L/R - After take off turn left climb on RDL 017 to DELBU and climb to cleared level.
MNM ROC 450 FT/NM.

DELBU 1F DEP:

DEP RWY 09L/R - After take off climb on RDL 090 to 3000 FT, then turn right to cross overhead at or above 6000 FT, then turn right to intercept RDL 017 to DELBU and climb to cleared level.
MNM ROC 250 FT/NM up to 1000 FT.

DELBU 1G DEP:

DEP RWY 27L/R - After take off turn right climb on RDL 017 to DELBU and climb to cleared level.
MNM ROC 450 FT/NM.

DELBU 1H DEP:

DEP RWY 27L/R - After take off climb on RDL 270 to 3000 FT, then turn left to cross overhead at or above 6000 FT, then turn left to intercept RDL 017 to DELBU and climb to cleared level.
MNM ROC 250 FT/NM up to 1000 FT.

IBNUX 1E DEP:

DEP RWY 09L/R - After take off turn right climb on RDL 137 to IBNUX and climb to cleared level.
MNM ROC 250 FT/NM.

IBNUX 1G DEP:

DEP RWY 27L/R - After take off turn left climb on RDL 137 to IBNUX and climb to cleared level.
MNM ROC 250 FT/NM.