AERODROME CHART - ICAO

MASHHAD / SHAHID HASHEMI NEJAD

Scale 1 : 15000

200M 0 200 400 600 800M
500FT 0 500 1000 2500FT

N — VAR 4°E

Hotspot :1
All aircraf on TWY C1, C2, A, B, Q, J must hold short of RWY 31L/13R.

Hotspot :2
All landing aircraft from RWY 31R/13L must hold short of RWY 31L/13R on TWYs F and G

Hotspot :3
caution, unauthorized vehicle movement

Aerodrome Elevation : 3266 FT

Aerodrome Lighting

13L	31R	13R	31L
SALS RTHL PAPI REDL RENL SWYL	PALS CAT I SFLS RTHL PAPI REDL RENL SWYL	SALS RTHL PAPI REDL RENL SWYL	SALS RTHL PAPI REDL RENL SWYL

ABN : FLG White, Green

Apron : INFO not AVBL

TWY Lighting

Edge : All TWYs

Center Line : NIL

ATS Communication Facilities

Service Designation	Frequency
TWR	118.100, 121.900
GND	121.700
ATIS	126.400
-	-

AD Reference Code : 4E

Displaced Threshold

NIL

RWY	Direction	Elevation	THR Coordinates	GUND	Bearing Strength (PCN) and Surface
13L	133.6°	3228 FT	361451.71N 0593735.23E	- 55 FT	60/F/B/X/T Asphalt
31R	313.6°	3260 FT	361326.45N 0593925.71E	- 55 FT	60/F/B/X/T Asphalt
13R	133.59°	3234 FT	361448.01N 0593727.83E	- 55 FT	60/F/B/X/T Asphalt
31L	313.61°	3266 FT	361320.29N 0593921.51E	- 55 FT	60/F/B/X/T Asphalt

VOR check point	TWY H : Coordinates: 361448.52N 0593731.16E, Radial: 303°, Distance: 1.54 NM TWY C2 : Coordinates: 361317.85N 0593918.01E, Radial: 155°, Distance: 0.6 NM

Apron
Taxiway
Runway
Building
Hotspot
Isolated ACFT Parking Position
Deicing Pad
Under Construction
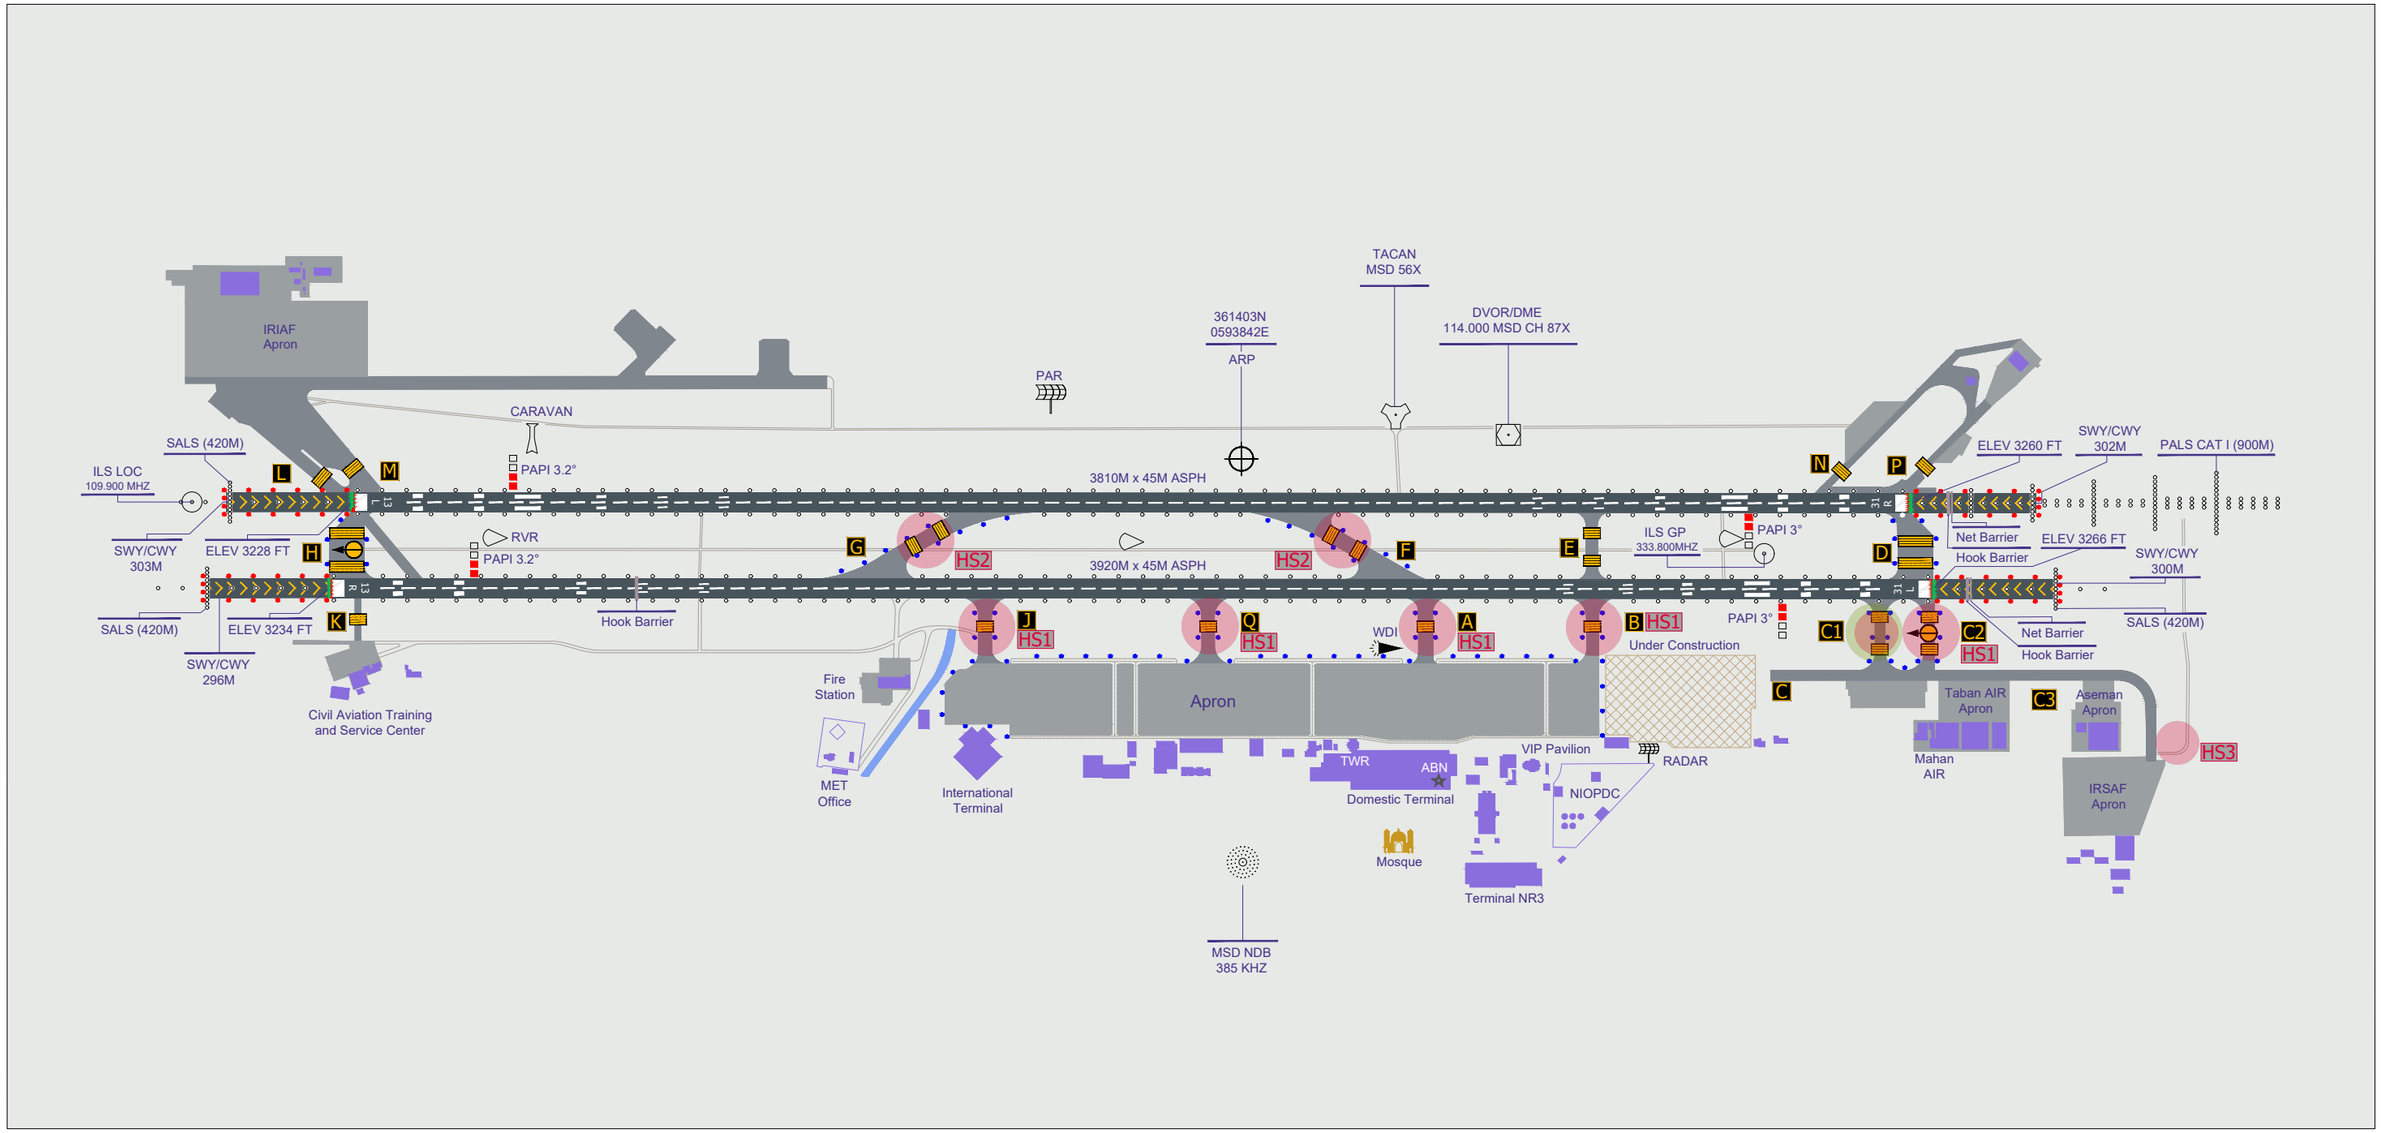
TWY	Width : A is 35M, E is 27M, C1 and C2 are 23M, (B, C, C3, F, J, L, M, N, P, Q) are 30M, G is 35M, K is 15M, D and H are 85M. Surface : TWYs A, C, C1, C2, C3, D, K and L Asphalt and TWYs B, E, J, M, N, P and Q concrete. Strength (PCN) : TWY A, C, C1, C2, C3, D and K PCN : 60/F/B/X/T, And TWY B, E, J, Q PCN: 70/R/B/W/T. for other TWY INFO not AVBL
Apron	Surface : Conceret Strength (PCN) : 65/R/B/X/T Dimensions : INFO not AVBL