INSTRUMENT
APPROACH
CHART–ICAO

AERODROME ELEV. 37 FT
HEIGHTS RELATED TO
THR RWY 16 ELEV. 5 FT

TWR	118.450, 122.100
	121.700
ATIS	126.850

SARI/DASHT–E–NAZ
ILS OR LOC RWY 16
CAT A/B/C/D

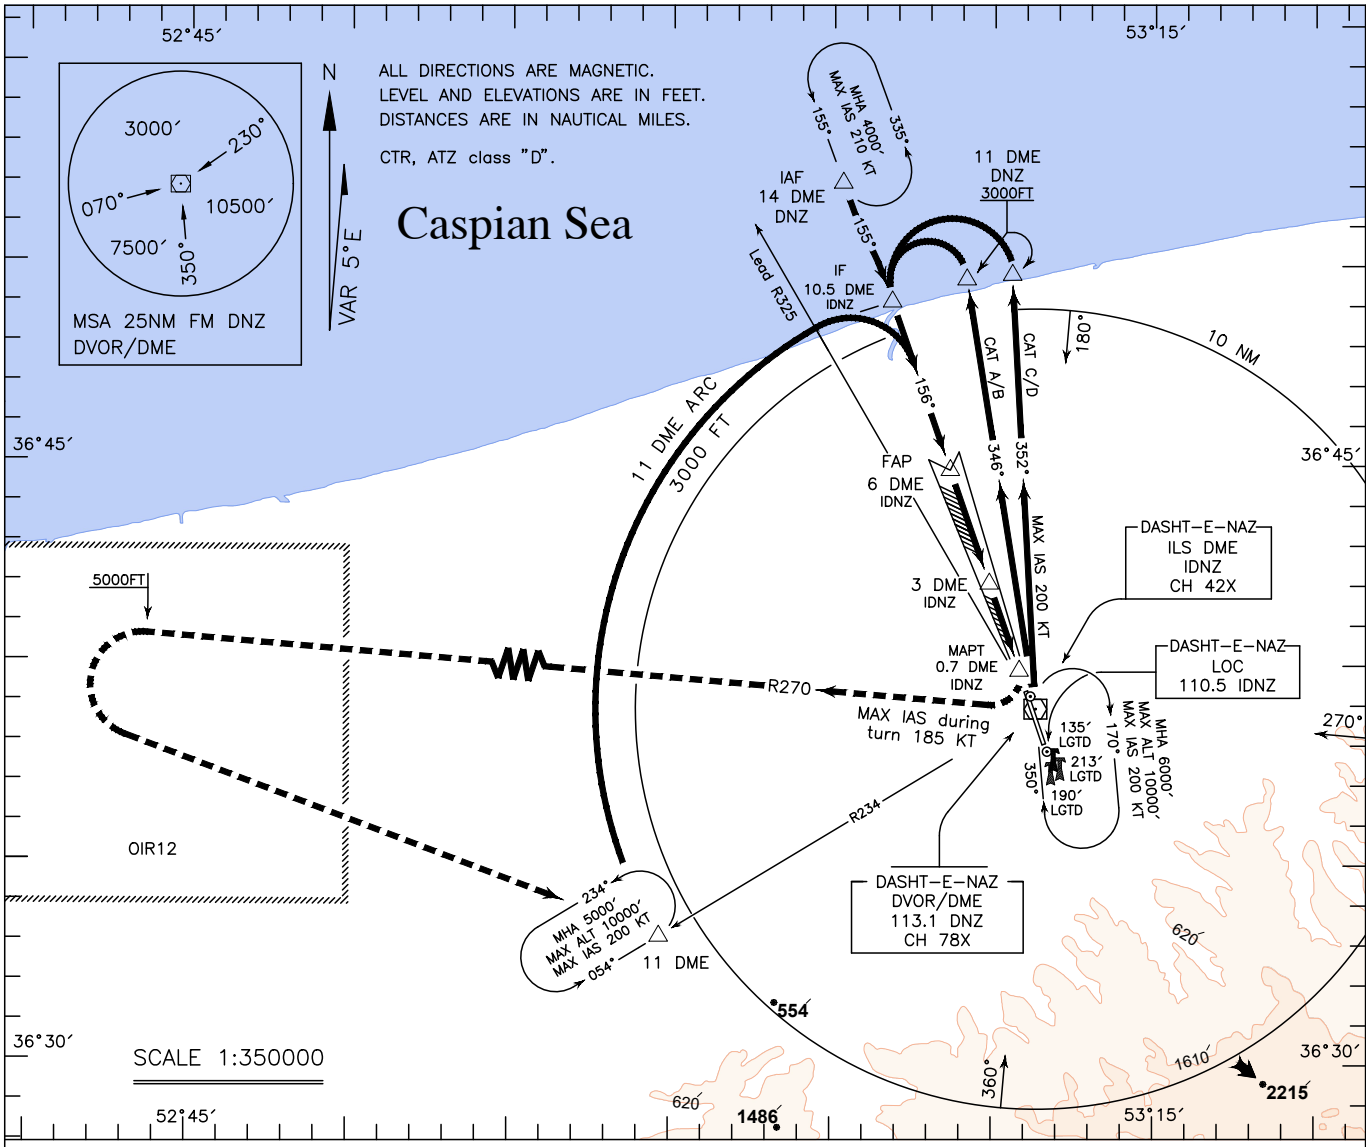

MISSED APPROACH: At 0.7 DME FM IDNZ turn right climb on RDL 270 to 5000 FT, (MAX IAS during turn 185 KT), then turn left to join HLDG at 5000 FT. HLDG (RDL 234–11DME).

TA 15000′

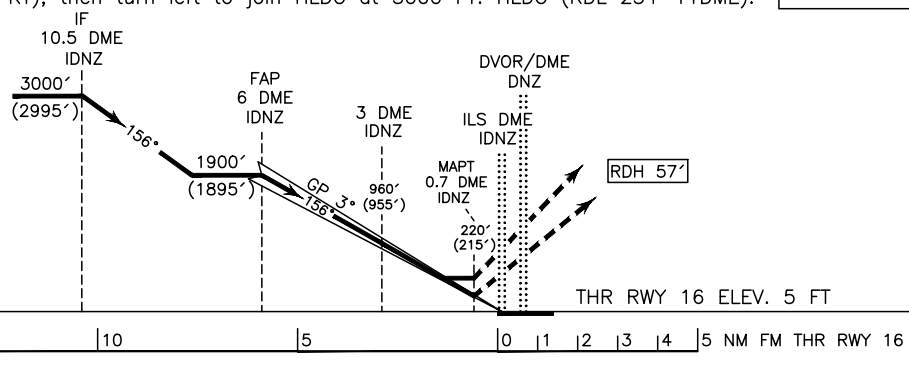

NOTE:

1–Contour intervals are to be selected at 990 FT.

2–Missed Approach procedure Penetrates R12.

3–Holding procedure IAF (RDL 234–11DME) Penetrates R12.

OCA(H)		A	B	C	D
Straight–in Approach	CAT I	220′(215′)			
	LOC (GP INOP)	470′(465′)			
Circling		850′(813′)		1540′(1503′)	