


INSTRUMENT AERODROME ELEV. 4917 FT
APPROACH HEIGHTS RELATED TO
CHART-ICAO THR RWY 29L ELEV. 4860 FT

RADAR 119.000-125.400
APP 119.000-125.400
TWR 118.100
GND 121.900
ATIS 127.000


SHIRAZ/SHAHID DASTGHAIB
ILS X or LOC X RWY 29L
CAT A/B/C/D

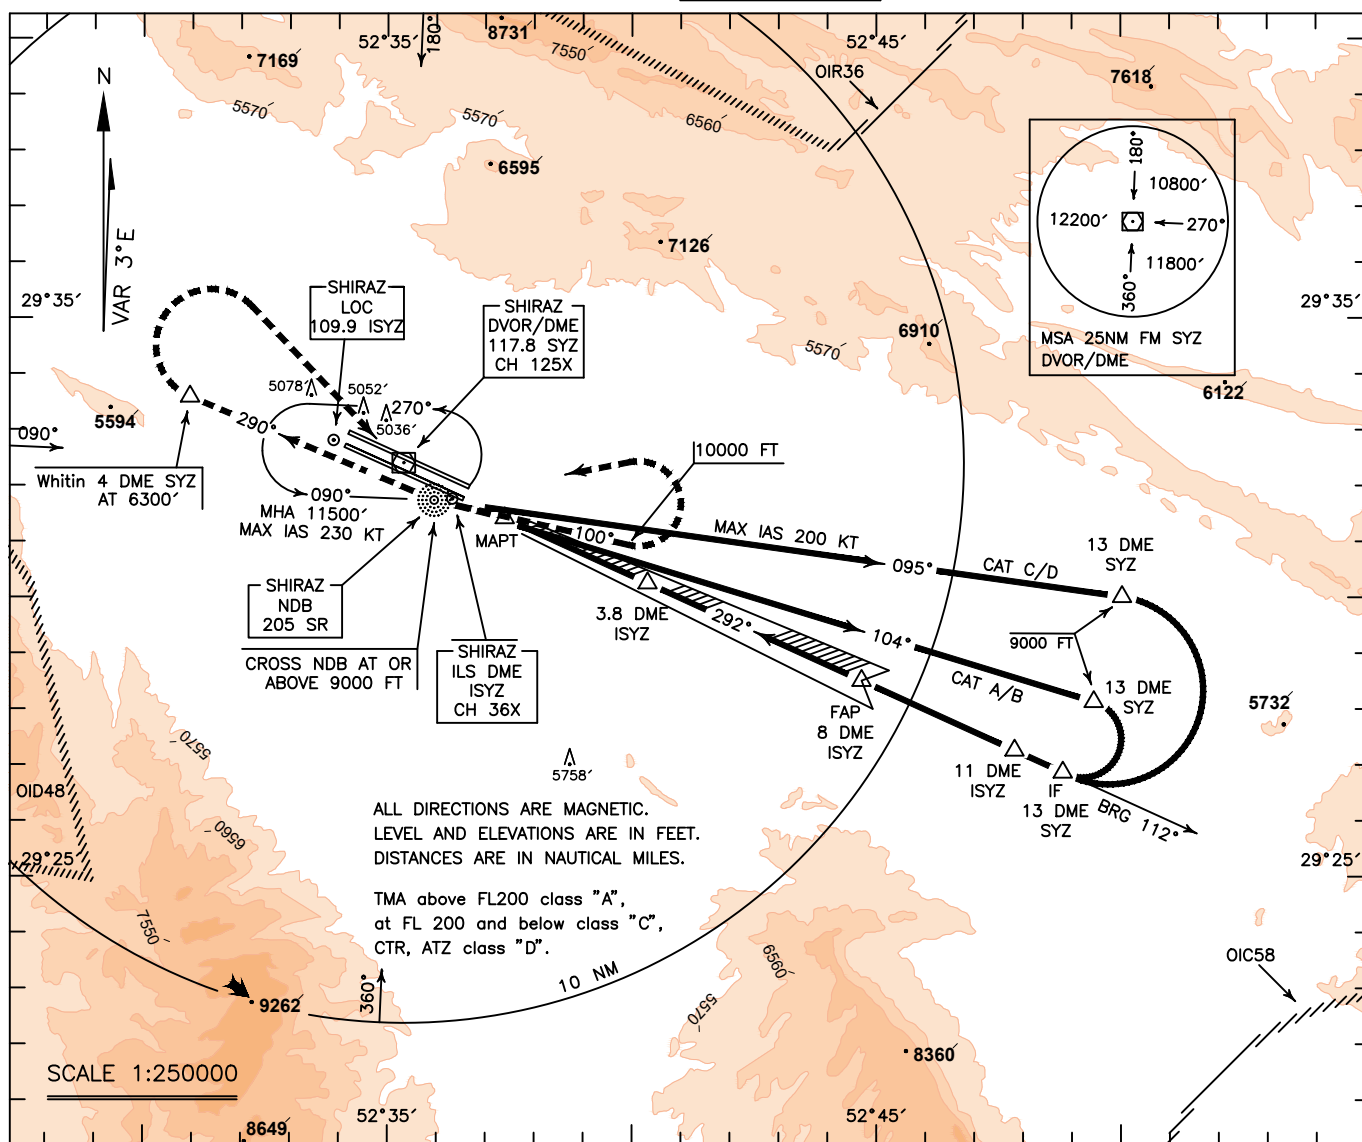

MISSED APPROACH: At MAPT (CAT A/B 0.9 DME ISYZ, CAT C/D 1 DME ISYZ) climb straight to SR NDB, then continue climb on BRG 290° to 6300 FT, then turn right (within 4 DME SYZ) to cross overhead SR NDB at or above 9000 FT, then establish BRG 100° to 10000 FT, then turn left to rejoin HLDG at 11500 FT.

NOTE:

- 1-Missed approach climb gradient (4.6%).
- 2-MNM Rate of climb during missed APCH 280 FT/NM,
- 3-MAX IAS 185 KT.

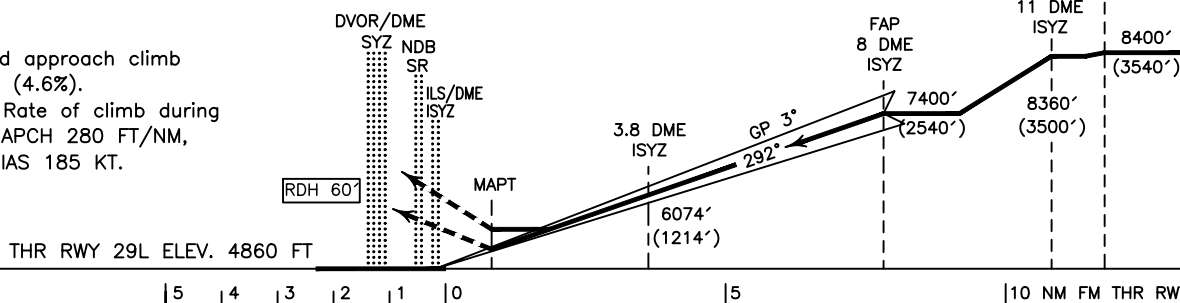

NOTE:

- 1- Circling not authorized to the north of AD for ACFT CAT C/D.
- 2- Contour intervals are to be selected at 990 FT.

OCA(H)		A	B	C	D
Straight-in Approach	CAT I	5155′(295′)		5174′(314′)	
	LOC (GP INOP)	5400′(540′)			
Circling		5600′(683′)		6200′(1283′)	6500′(1583′)