


STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO

TRANSITION ALTITUDE
13000 FT

RADAR	119.000-125.400
APP	119.000-125.400
TWR	118.100
GND	121.900
ATIS	127.000

SHIRAZ/SHAHID DASTGHAIB
RWY 11R/L 29L/R
KUGVU 1E/1F/1G/1H

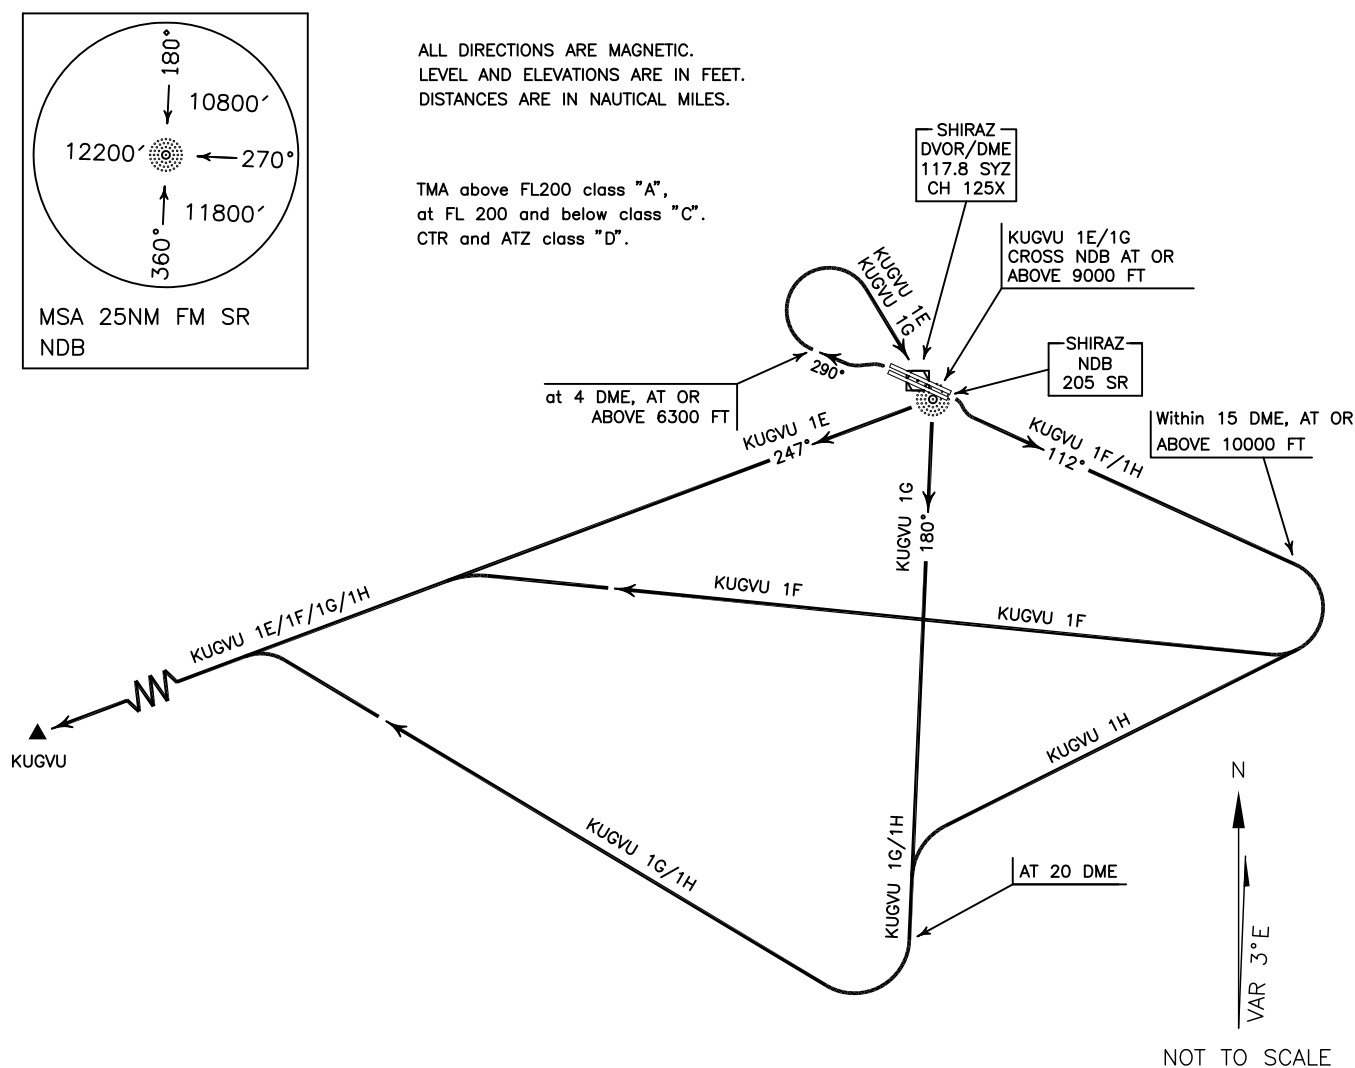

KUGVU 1E DEP:

DEP RWY 29L/R – After take off turn left climb on BRG 290° to 6300 FT or above, then turn right (at 4 DME) to cross SR NDB at or above 9000 FT, then turn right to establish BRG 247° to KUGVU and climb to cleared level.

MNM rate of climb 350 FT/NM up to 12000 FT, MAX IAS up to SR NDB 230 KT.

This procedure is not usable when OID48 is active.

KUGVU 1F DEP:

DEP RWY 11R/L – After take off climb on BRG 112° to 10000 FT or above, then turn right (within 15 DME) to establish BRG 247° to KUGVU and climb to cleared level.

MNM rate of climb 350 FT/NM up to 10000 FT.

This procedure is not usable when OID48 is active.

KUGVU 1G DEP:

DEP RWY 29L/R – After take off turn left climb on BRG 290° to 6300 FT or above, then turn right (at 4 DME) to cross SR NDB at or above 9000 FT, then turn right to establish BRG 180°, at 20 DME turn right to establish BRG 247° to KUGVU and climb to cleared level.

MNM rate of climb 350 FT/NM up to 12000 FT, MAX IAS up to SR NDB 230 KT.

KUGVU 1H DEP:

DEP RWY 11R/L – After take off climb on BRG 112° to 10000 FT or above, then turn right (within 15 DME) to establish BRG 180°, at 20 DME turn right to establish BRG 247° to KUGVU and climb to cleared level.

MNM rate of climb 350 FT/NM up to 10000 FT.