

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO


TRANSITION ALTITUDE
12000 FT

TWR 118.150, 121.900
ATIS 126.650

ARDABIL
RWY 15/33, RWY 07/25
GIVTA 1D/1E/1J/1L/1M

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.

ATZ class "D".

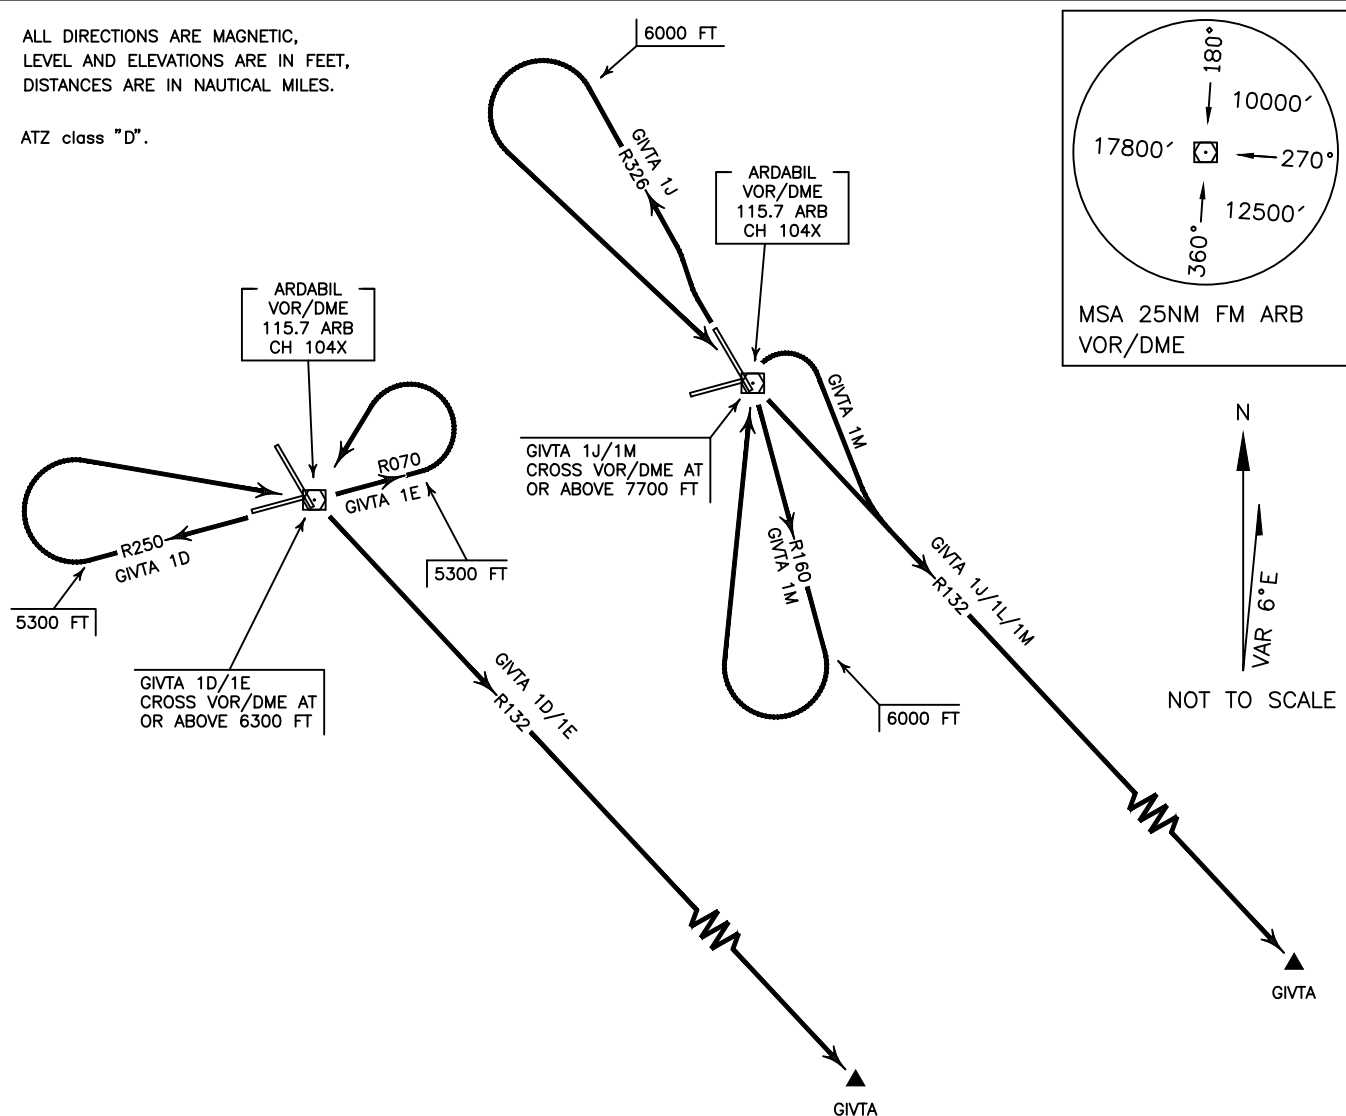

GIVTA 1D DEP:

DEP RWY 25 - After take off climb on RDL 250 to 5300 FT, then turn right to cross overhead VOR/DME at or above 6300 FT, then turn right to intercept RDL 132 to GIVTA and climb to cleared level.
MNM rate of climb 230 FT/NM up to FL 130.

GIVTA 1E DEP:

DEP RWY 07 - After take off climb on RDL 070 to 5300 FT, then turn left to cross overhead at or above 6300 FT, then turn left to intercept RDL 132 to GIVTA and climb to cleared level.
MNM rate of climb 330 FT/NM up to FL 130.

GIVTA 1J DEP:

DEP RWY 33 - After take off climb on RDL 326 to 6000 FT, then turn left to cross overhead VOR/DME at or above 7700 FT, then intercept RDL 132 to GIVTA and climb to cleared level.
MNM rate of climb 250 FT/NM up to FL 130.

GIVTA 1L DEP:

DEP RWY 15 - After take off turn left to intercept RDL 132 to GIVTA and climb to cleared level.
MNM rate of climb 350 FT/NM up to FL 130.

GIVTA 1M DEP:

DEP RWY 15 - After take off turn right climb on RDL 160 to 6000 FT, then turn right to cross overhead VOR/DME at or above 7700 FT, then turn right to intercept RDL 132 to GIVTA and climb to cleared level.
MNM rate of climb 250 FT/NM up to FL 130.