


INSTRUMENT
APPROACH
CHART-ICAO

AERODROME ELEV. 4054 FT
HEIGHTS RELATED TO
THR RWY 31 ELEV. 4054 FT

TWR 122.700
121.900
ATIS 126.250

YAZD/SHAHID SADOOGHI
ILS or LOC RWY 31
CAT A/B/C/D

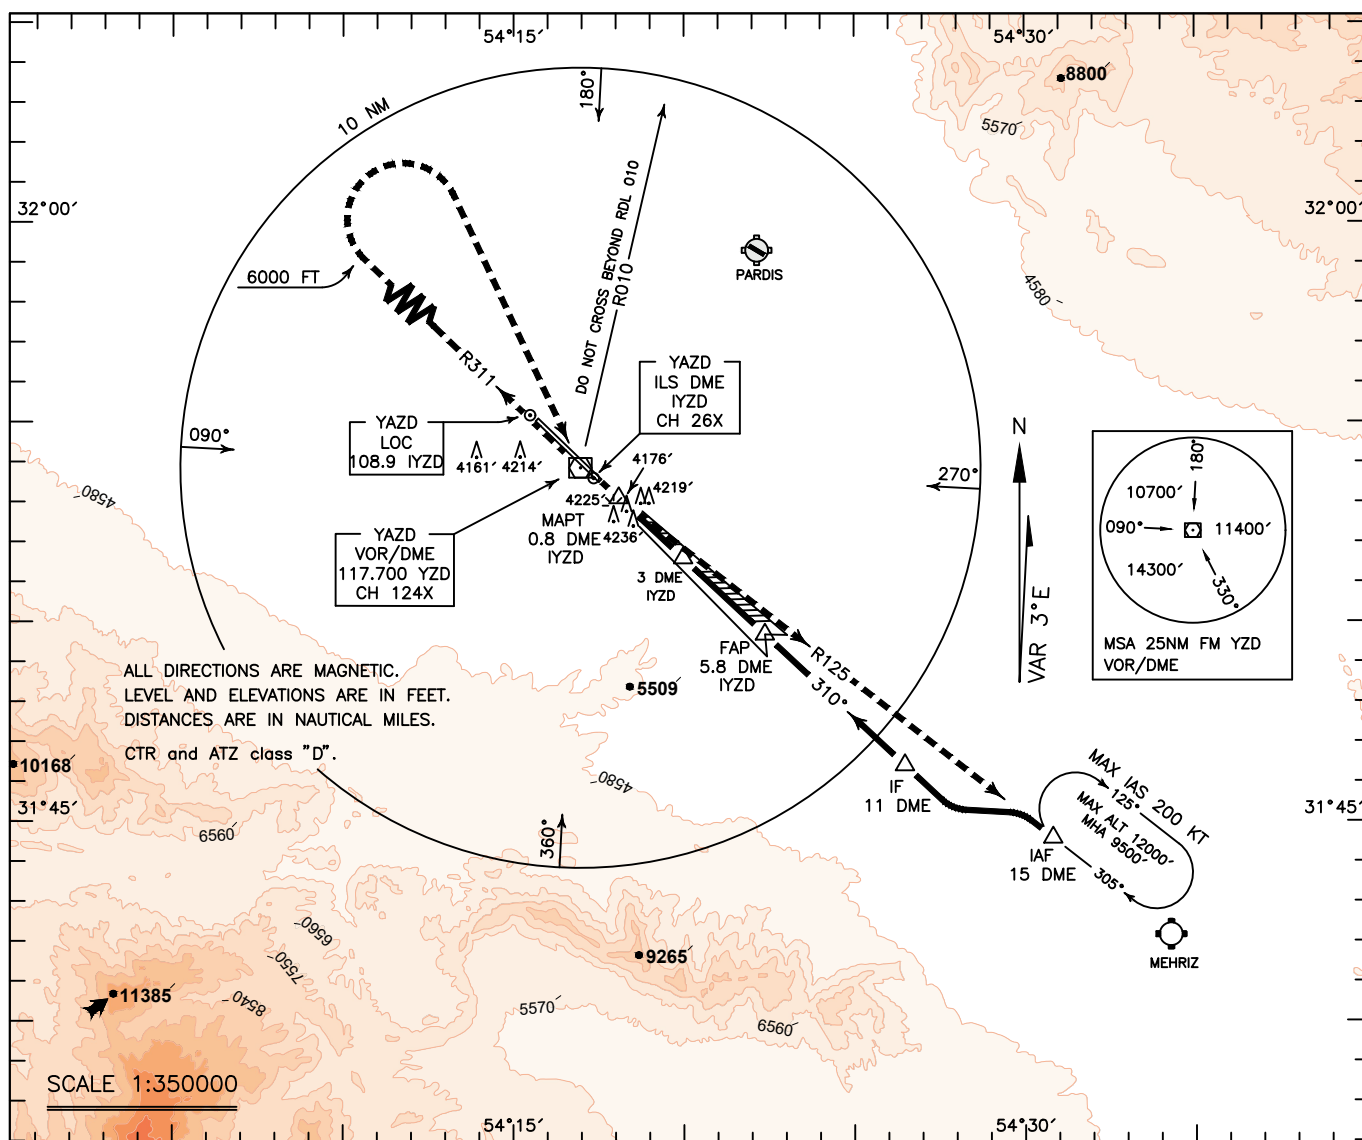


MISSED APPROACH: At 0.8 IYZD climb to overhead VOR/DME, then climb on RDL 311 to 6000 FT, then turn right to cross overhead VOR/DME, then turn left climb on RDL 125 rejoin HLDG at 9500 FT.

TA 12000'

NOTE:

- 1: To avoid high terrain, when proceeding to overhead, DO NOT CROSS BEYOND RDL 010.
- 2: Missed approach climb gradient: 2.7%

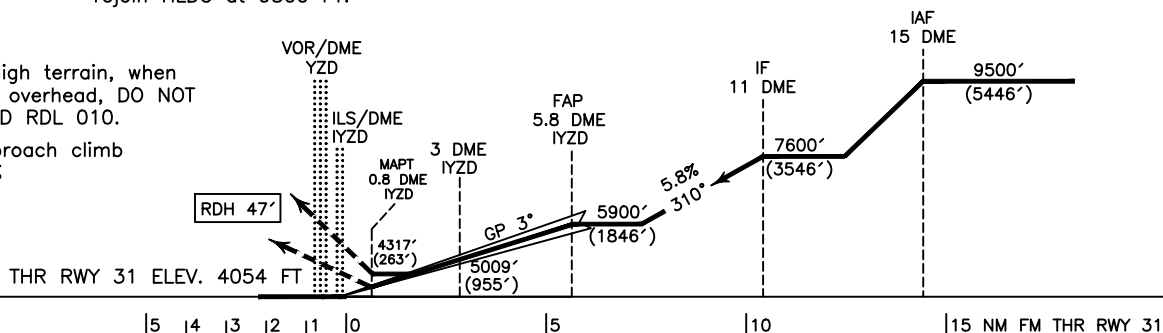

NOTE:

- 1- Circling not authorized clockwise between RDL 150 and RDL 230 for CAT C,D.
- 2- Contour intervals are to be selected at 990 FT.

OCA(H)		A	B	C	D
Straight-in Approach	CAT I	4317' (263')			
	LOC (GP INOP)	4630' (576')			
Circling		4640' (586')		4800' (746')	