


INSTRUMENT
APPROACH
CHART-ICAO

AERODROME ELEV. 4520 FT
HEIGHTS RELATED TO
DTHR RWY 35L ELEV. 4516 FT

TWR 118.100, 119.400
121.900
ATIS 128.450

ZAHEDAN
ILS Y or LOC Y RWY 35L
CAT A/B/C/D

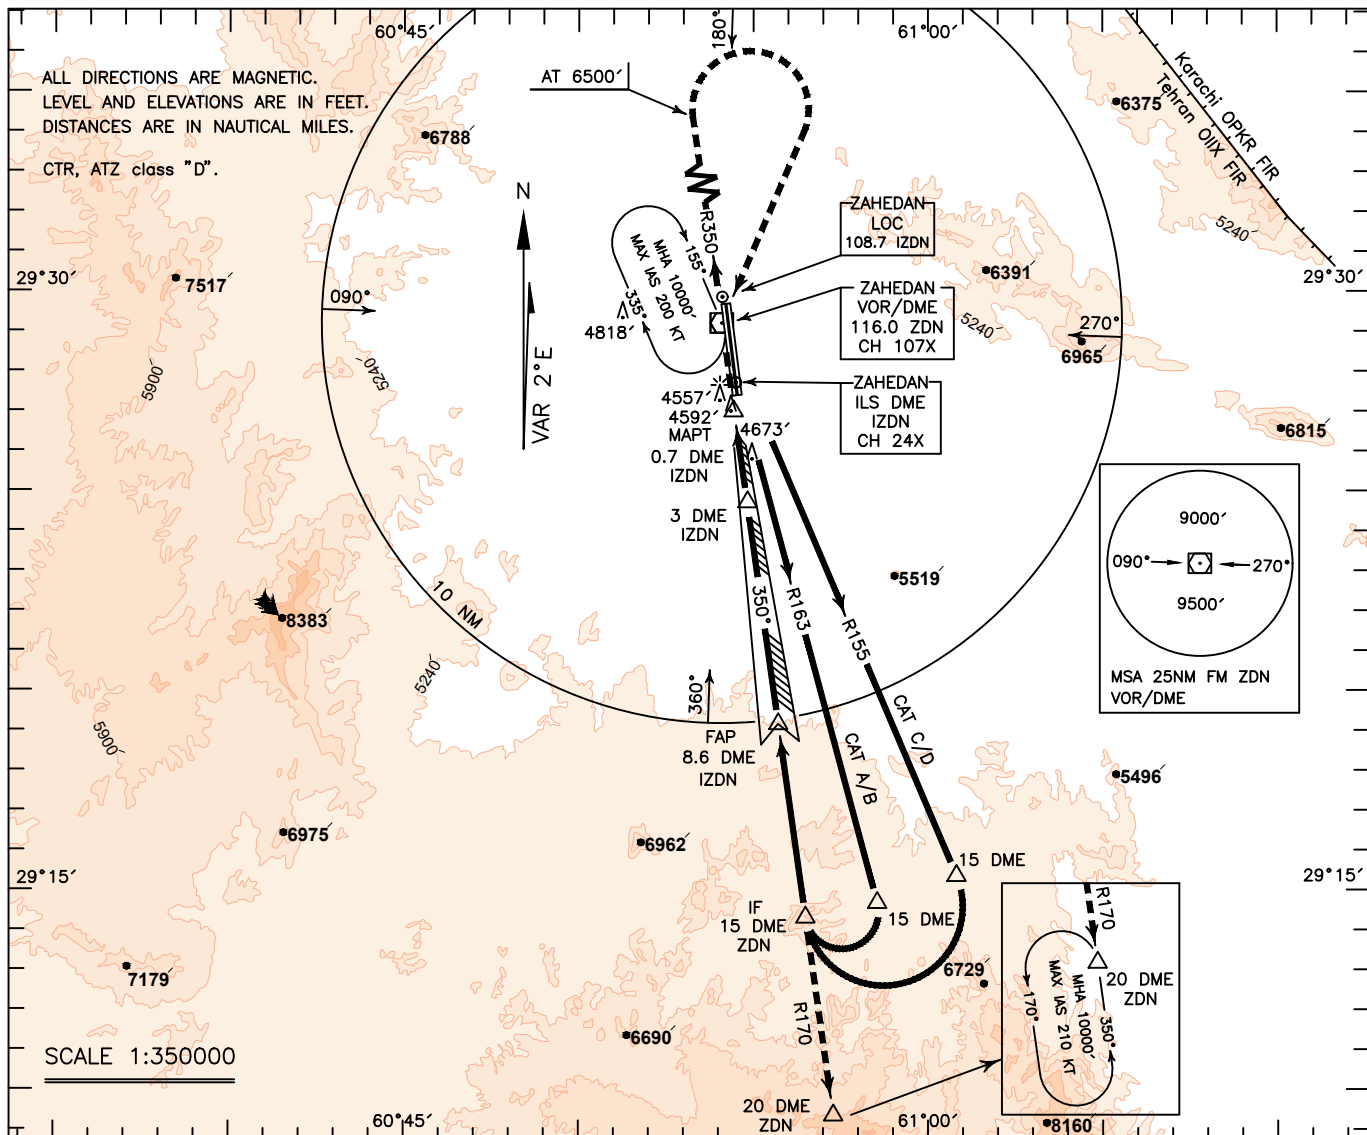


MISSED APPROACH: At 0.7 DME climb on MAG TR 350° (RDL 170) to ZDN VOR/DME, then climb on RDL 350 to 6500 FT, then turn right to cross overhead ZDN VOR/DME, then intercept RDL 170 to rejoin HLDG (RDL 170-20 DME) at 10000 FT. MAX IAS 200kt.

TA 11000'

NOTE:

MNM rate of climb
250 FT/NM.

DTHR RWY 35L ELEV. 4516 FT

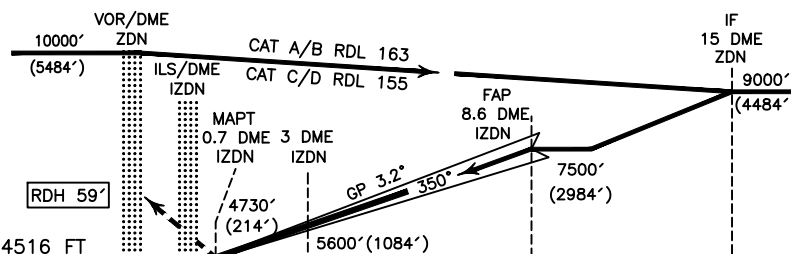

NOTE:

1-Circling not authorized to the east of the aerodrome
(BTN RDL 020 and RDL 130 clockwise direction).

2-Contour intervals are to be selected at 660 FT.

OCA(H)		A	B	C	D
Straight-in Approach	CAT I	4730' (214')			
	LOC (GP INOP)	5370' (850')			
Circling		5650' (1130')			