INSTRUMENT
APPROACH
CHART-ICAO

AERODROME ELEV. 4520 FT
HEIGHTS RELATED TO
AERODROME ELEVATION

| | |
|---|---|
| TWR | 118.100, 119.400 |
| | 121.900 |
| ATIS | 128.450 |

ZAHEDAN
VOR Z RWY 35L/R
CAT A/B/C/D

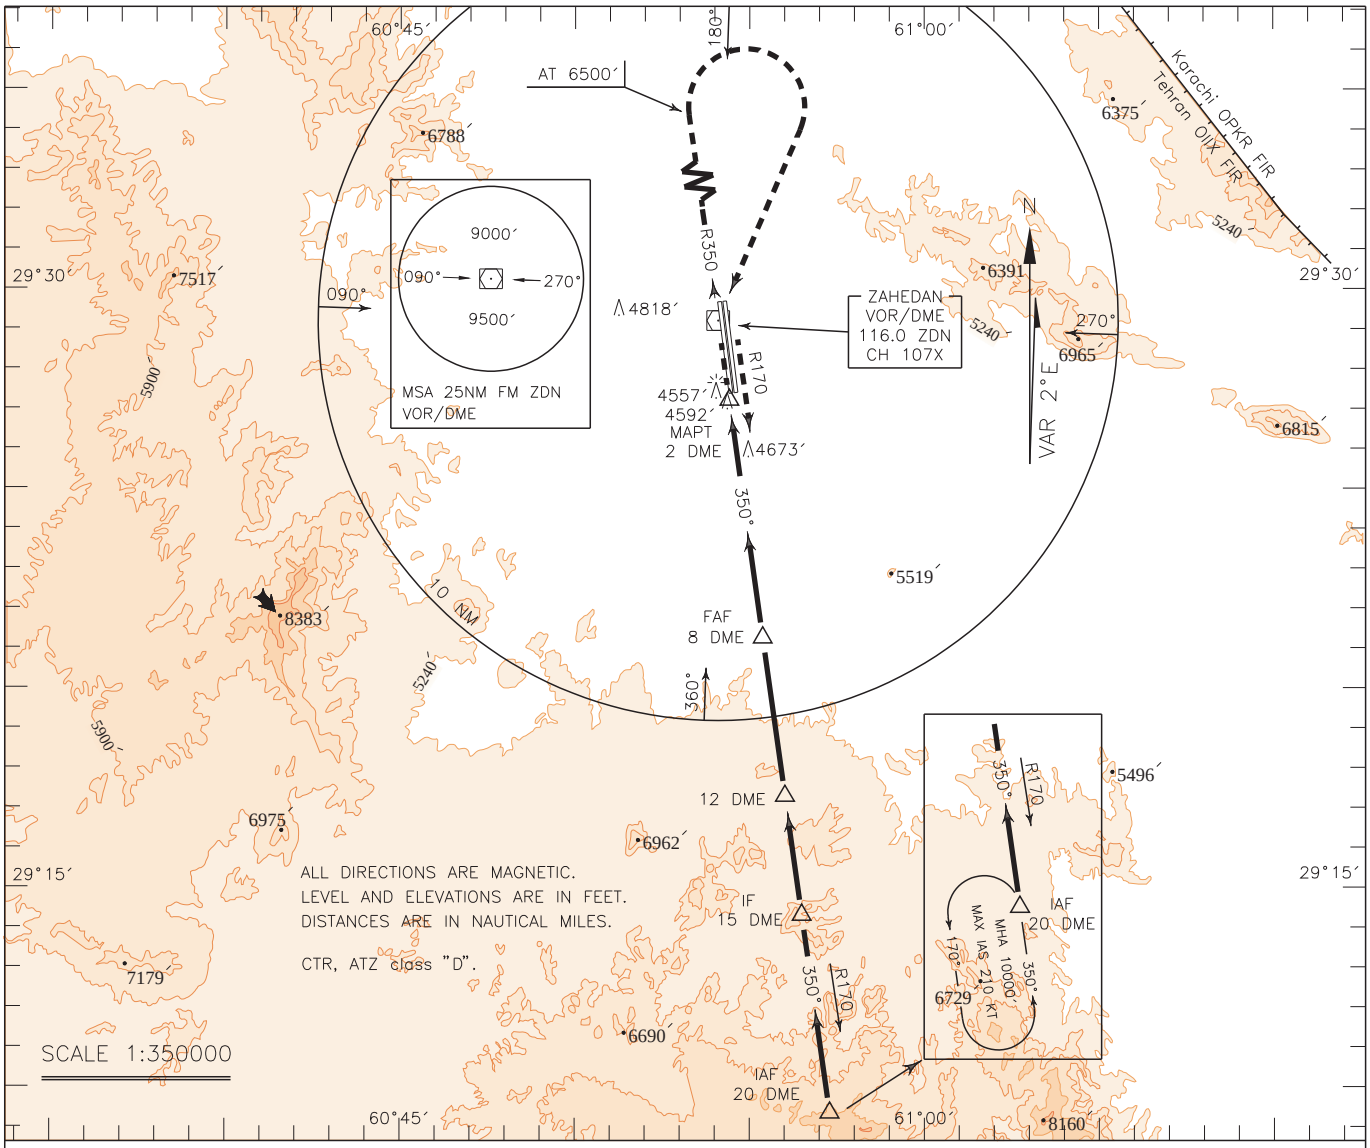


MISSED APPROACH: At 2 DME climb on MAG TR 350° (RDL 170) to ZDN VOR/DME, then climb on RDL 350 to 6500 FT, then turn right to cross overhead VOR/DME, then intercept RDL 170 to rejoin HLDG (RDL170-20 DME) at 10000 FT. MAX IAS 200 kt.

TA 11000′

NOTE:

MNM rate of climb 250 FT/NM.

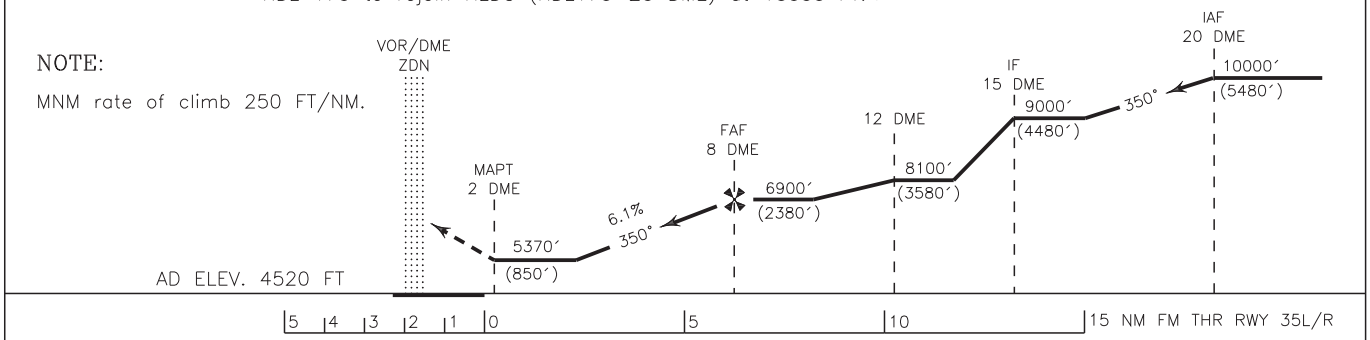


NOTE:

1-Circling not authorized to the east of the aerodrome (BTN RDL 020 and RDL 130 clockwise)

2-Contour intervals are to be selected at 660 FT.

| OCA(H) | A | B | C | D |
|---|---|---|---|---|
| Straight-in Approach | 5370′(850′) | | | |
| Circling | 5650′(1130′) | | | |