

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO



TRANSITION ALTITUDE
11000 FT

TWR 118.100, 119.400
121.900
ATIS 128.450

ZAHEDAN
RWY 35L/R, 17L/R
OBSEL 1D/1E

ALL DIRECTIONS ARE MAGNETIC.
LEVEL AND ELEVATIONS ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.

CTR and ATZ class "D".

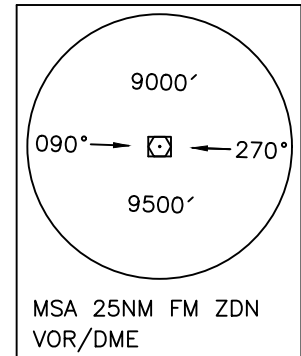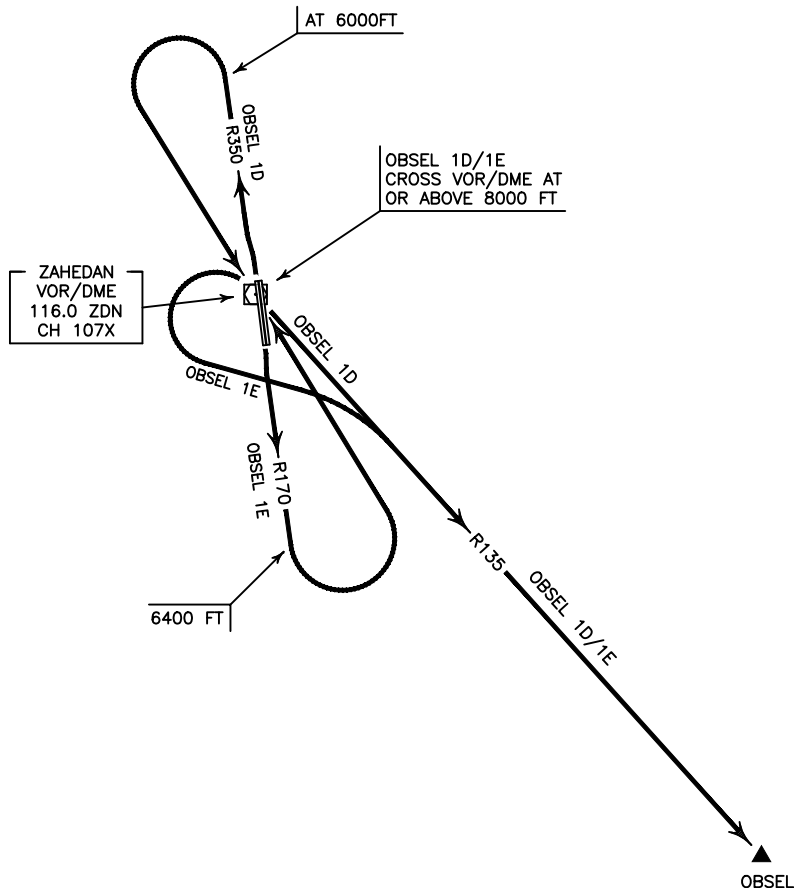

N
VAR 2°E
NOT TO SCALE

OBSEL 1D DEP:

DEP RWY 35L/R – After take off climb on RDL 350 to 6000 FT, then turn left to cross overhead ZDN VOR/DME at or above 8000 FT, then intercept RDL 135 to OBSEL and climb to cleared level.

MNM rate of climb 320 FT/NM up to overhead ZDN VOR/DME.

Note: turn below 6000 FT is not authorized.

OBSEL 1E DEP:

DEP RWY 17L/R – After take off climb on RDL 170 to 6400 FT, then turn left to cross overhead ZDN VOR/DME at or above 8000 FT, then turn left to intercept RDL 135 to OBSEL and climb to cleared level.

MNM rate of climb 260 FT/NM up to overhead ZDN VOR/DME.

Note: turn below 6400 FT is not authorized.