

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO

TRANSITION ALTITUDE
13000 FT

TWR 123.500, 121.900



HAMADAN
RWY 10/28
ORLOG 1A/1B/1C

ALL DIRECTIONS ARE MAGNETIC.
LEVEL AND ELEVATIONS ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.

ATZ class "D".



NOT TO SCALE

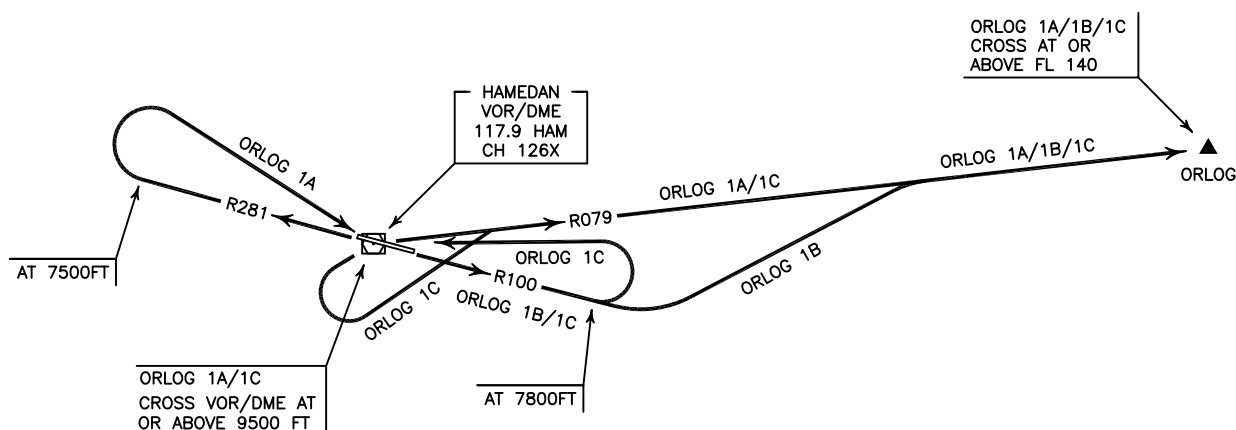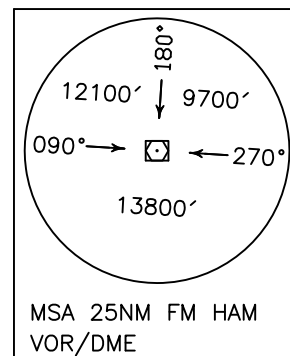

ORLOG 1A DEP:

DEP RWY 28 - After take off climb on RDL 281 to 7500 FT, then turn right to cross overhead HAM VOR/DME, at or above 9500 FT, then turn left to intercept RDL 079 to cross ORLOG at or above FL 140 and climb to cleared level.

ORLOG 1B DEP:

DEP RWY 10 - After take off climb on RDL 100 to 7800 FT, then turn left intercept RDL 079 to cross ORLOG at or above FL 140 and climb to cleared level.
MNM rate of climb 245 FT/NM.

ORLOG 1C DEP:

DEP RWY 10 - After take off climb on RDL 100 to 7800 FT, then turn left to cross overhead HAM VOR/DME, at or above 9500 FT, then turn left to intercept RDL 079 to cross ORLOG at or above FL 140 and climb to cleared level. MNM rate of climb 245 FT/NM up to 8000 FT.