

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO

TRANSITION LEVEL	FL 110
TRANSITION ALTITUDE	9000 FT



RADAR	125.100, 119.700
APP	125.100, 119.700
TWR	118.700
GND	121.600, 121.825
ATIS	127.200

TEHRAN/IMAM KHOMAINI
RWY 11L/R, 29L/R
NABAX 1G/1L

ALL DIRECTIONS ARE MAGNETIC.
LEVEL AND ELEVATIONS ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.

TMA above FL200 class "A",
at FL 200 and below class "C".
CTR and ATZ class "D".

N
VAR 5°E
NOT TO SCALE

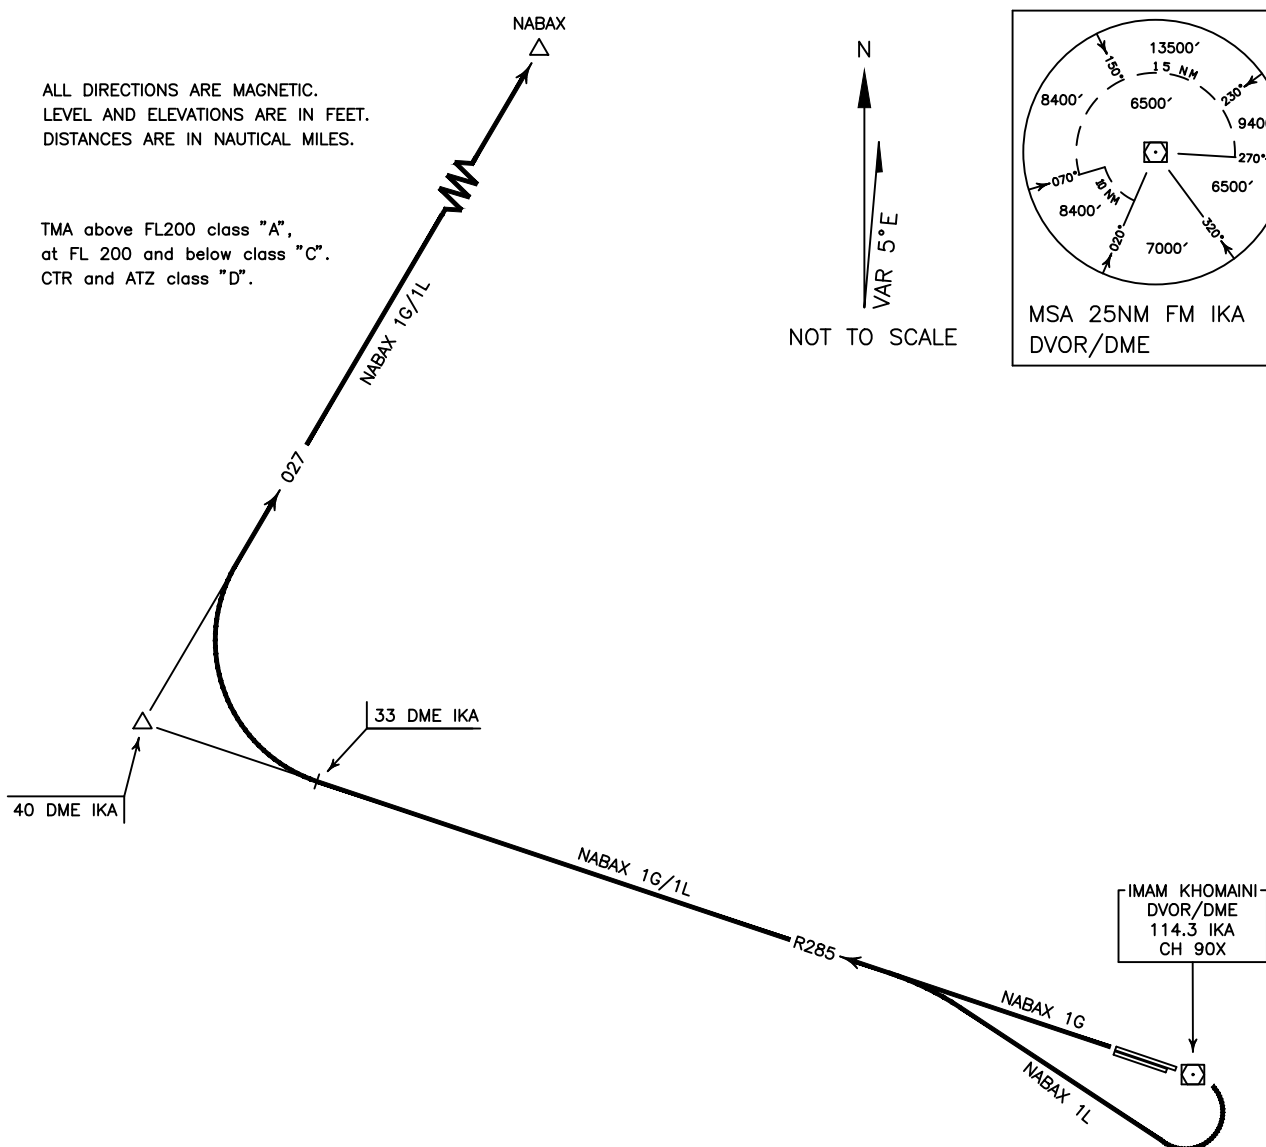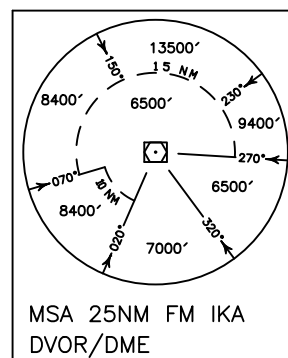

NABAX 1G DEP:

DEP RWY 29L/R- After take off climb on RDL 285, at 33 DME commence right turn to intercept TR 027° MAG to NABAX and climb to cleared level.
MNM rate of climb 225 FT/NM.

NABAX 1L DEP:

DEP RWY 11L/R- After take off turn right climb on RDL 285, at 33 DME commence right turn to intercept TR 027° MAG to NABAX and climb to cleared level.
MNM rate of climb 215 FT/NM.