

STANDARD ARRIVAL CHART-  
INSTRUMENT (STAR)-ICAO

|                     |                        |
|---------------------|------------------------|
| TRANSITION LEVEL    | RADAR 125.100, 119.700 |
| FL 110              | APP 125.100, 119.700   |
| TRANSITION ALTITUDE | TWR 118.700            |
| 9000 FT             | GND 121.600, 121.825   |
|                     | ATIS 127.200           |


TEHRAN/IMAM KHOMAINI  
RNAV1 RWY 29R  
RADAL 3X  
BOXAM 2X

ALL DIRECTIONS ARE MAGNETIC,  
LEVEL AND ELEVATIONS ARE IN FEET,  
DISTANCES ARE IN NAUTICAL MILES.

TMA above FL200 class "A",  
at FL 200 and below class "C".  
CTR and ATZ class "D".


NOTE:  
DME/DME required

N  
VAR 5°E  
NOT TO SCALE

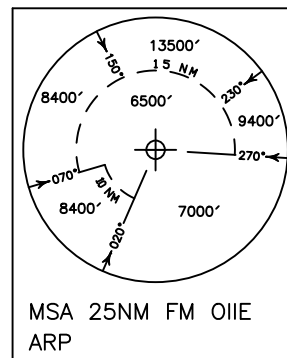

ACTUAL DESCENT CLEARANCE  
WILL BE AS DIRECTED BY ATC.

SPEED RESTRICTION  
Within TMA: MAX 270 KT IAS  
Within CTR: MAX 230 KT IAS

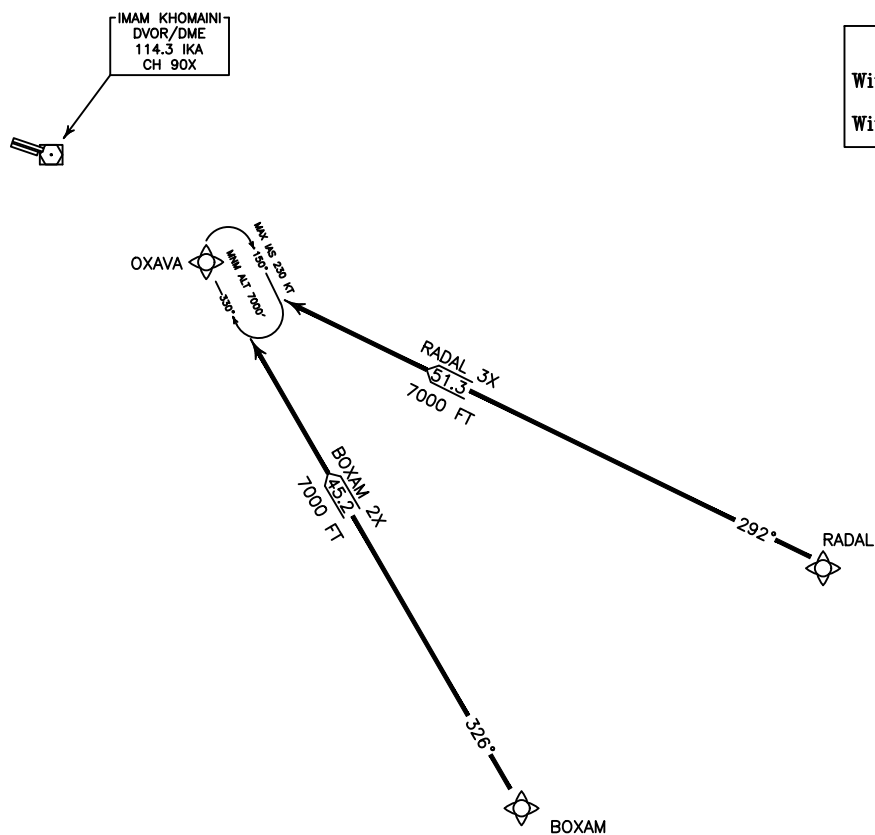

RADAL 3X ARR:  
FM RADAL proceed to OXAVA.

BOXAM 2X ARR:  
FM BOXAM proceed to OXAVA.