


INSTRUMENT AERODROME ELEV. 3266 FT
APPROACH HEIGHTS RELATED TO
CHART-ICAO THR RWY 31R ELEV. 3260 FT


RADAR 127.300
APR 127.300
TWR 118.100, 121.900
GND 121.700
ATIS 126.400

MASHHAD/SHAHID HASHEMI NEJAD
ILS X or LOC X RWY 31R
CAT C/D

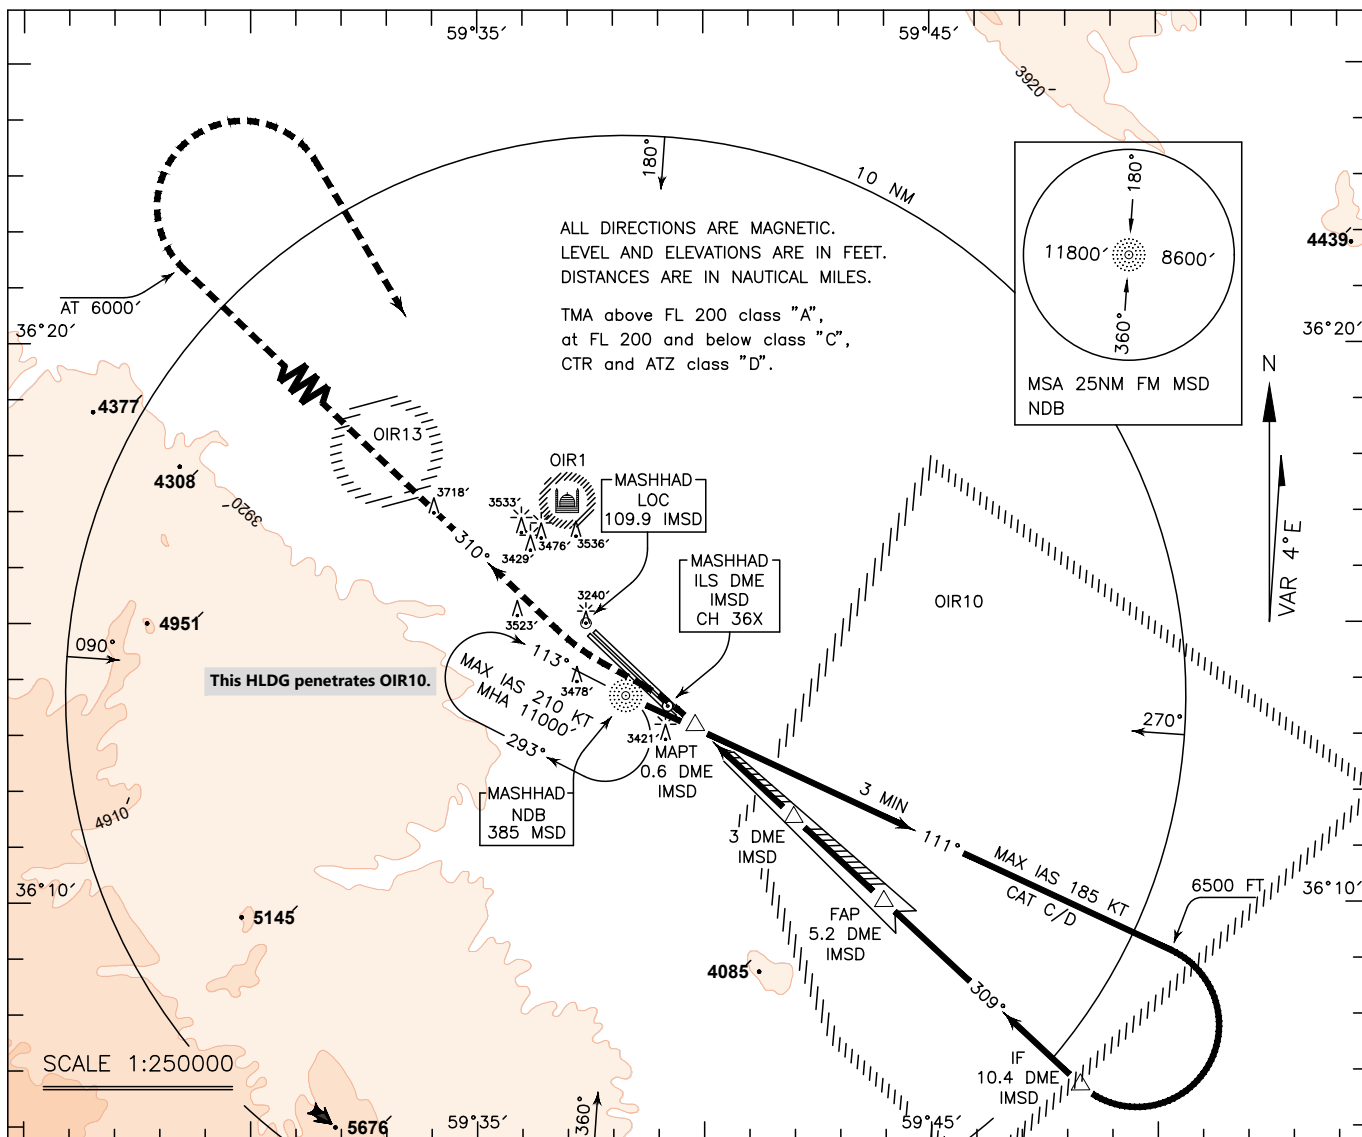

MISSED APPROACH: At 0.6 DME (IMSD) climb on TR 309 MAG to intercept BRG 310° to 6000 FT, then turn right to rejoin HLDG at 11000 FT.

TA 12000'

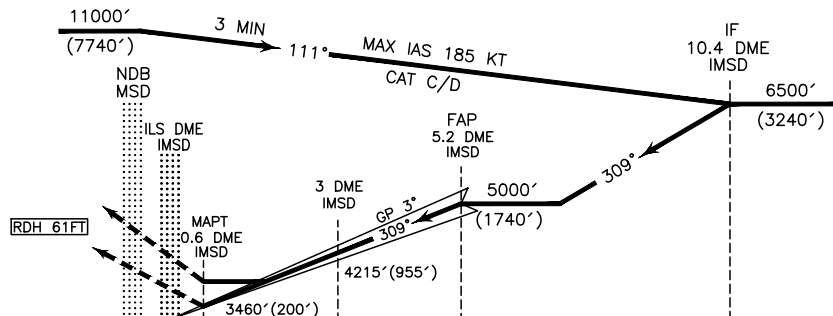

NOTE:

- 1-Circling not authorized BTN BRG 150° and BRG 300° clockwise direction.
- 2-This procedure penetrates OIR10, OIR70 and OIR35.
- 3-Contour intervals are to be selected at 990 FT.

OCA(H)		A	B	C	D
Straight-in Approach	CAT I			3460'(200')	
	LOC (GP INOP)			3810'(550')	
Circling				4000'(734')	4270'(1004')