

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO

TRANSITION ALTITUDE
9000 FT

TWR 127.350, 121.900



LAR
RWY 27
NABEX 3C
ROTAL 3A

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.

ATZ class "D".



NOT TO SCALE

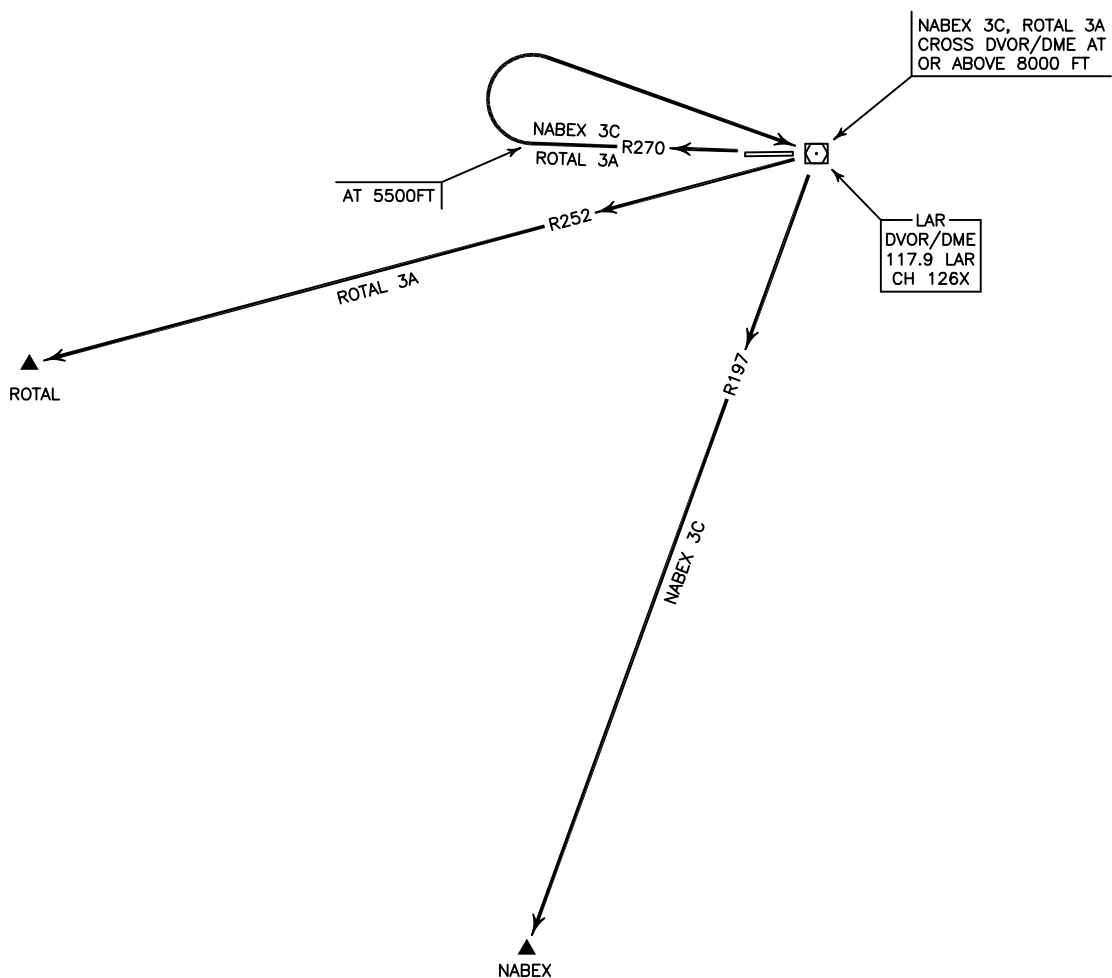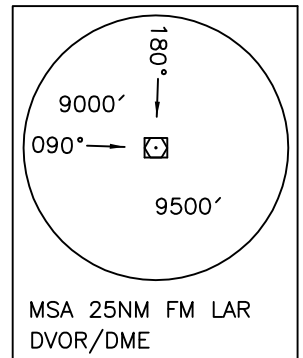

NABEX 3C DEP:

DEP RWY 27 - After take off climb on RDL 270 to 5500 FT, then turn right to cross overhead DVOR/DME at or above 8000 FT, then intercept RDL 197 to NABEX and climb to cleared level.
MNM rate of climb 280 FT/NM up to 20 DME.

ROTAL 3A DEP:

DEP RWY 27 - After take off climb on RDL 270 to 5500 FT, then turn right to cross overhead DVOR/DME at or above 8000 FT, then intercept RDL 252 to ROTAL and climb to cleared level.
MNM rate of climb 280 FT/NM.