


INSTRUMENT APPROACH
CHART-ICAO

AERODROME ELEV. 4917 FT
HEIGHTS RELATED TO
AERODROME ELEVATION

RADAR	119.000-125.400
APP	119.000-125.400
TWR	118.100
GND	121.900
ATIS	127.000


SHIRAZ/SHAHID DASTGHAIB
VOR A
CAT A/B/C/D

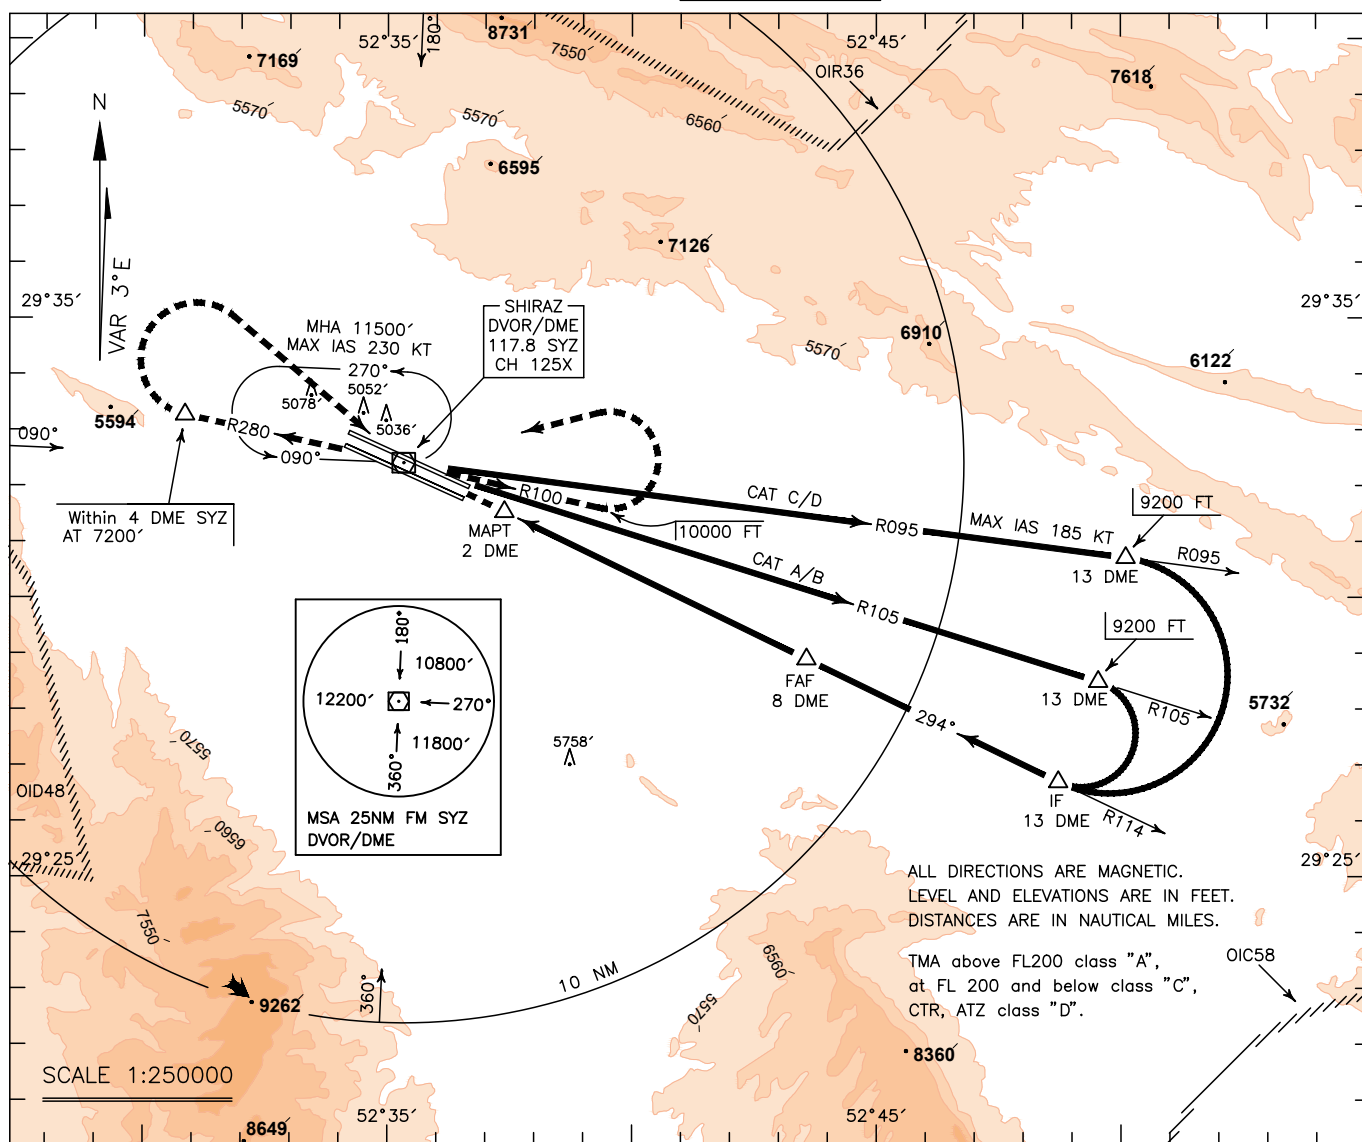

MISSED APPROACH: At 2 DME climb straight to DVOR/DME, then continue climb on RDL 280 to 7200 FT, then turn right (within 4 DME SYZ) to cross overhead DVOR/DME at or above 9000 FT, then intercept RDL 100 to 10000 FT, then turn left to rejoin HLDG at 11500 FT. TA 13000'

NOTE:

- 1-Missed approach climb gradient (4.6%).
- 2-MNM Rate of climb during missed APCH 280 FT/NM,
- 3-MAX IAS 185 KT.

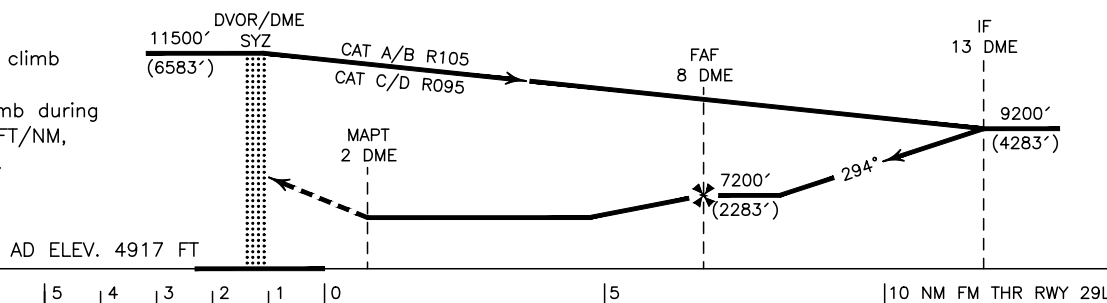

NOTE:

- 1- Circling not authorized to the north of AD for ACFT CAT C/D.
- 2- Contour intervals are to be selected at 990 FT.

OCA(H)	A	B	C	D
Straight-in Approach				
Circling	5600'(683')	6200'(1283')	6500'(1583')	