

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO



TRANSITION ALTITUDE
12000 FT

TWR 118.150, 121.900
ATIS 126.650

ARDABIL
RWY 15/33, RWY 07/25
ITUPA 1D/1E/1J/1L

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.

ATZ class "D".

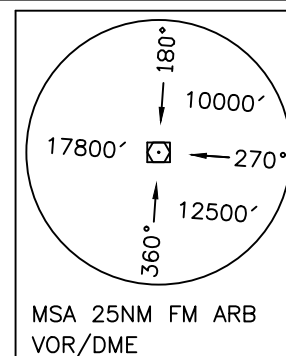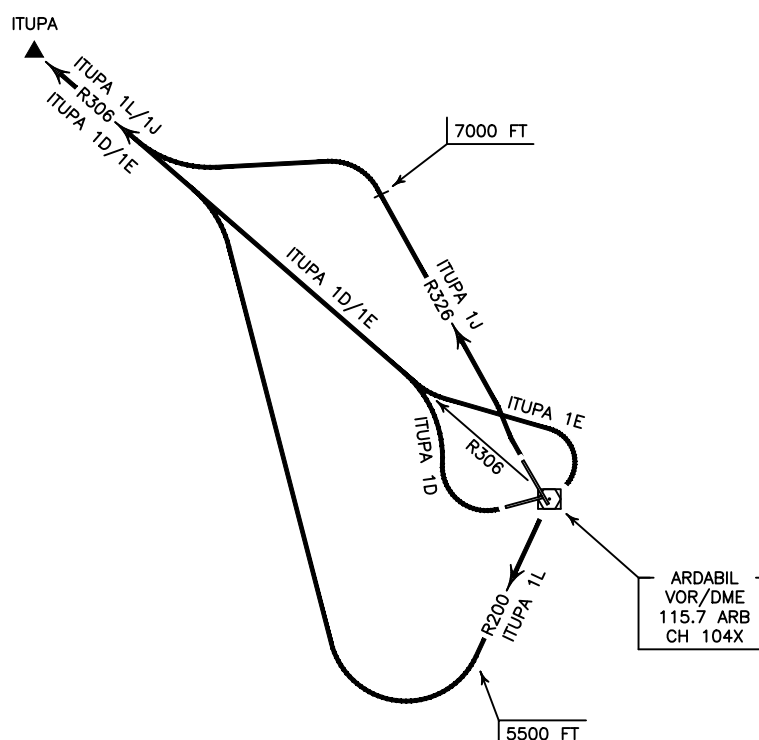

N
VAR 6°E
NOT TO SCALE

ITUPA 1D DEP:

DEP RWY 25 - After take off turn right to intercept RDL 306 to ITUPA and climb to cleared level.
MNM rate of climb 270 FT/NM.

ITUPA 1E DEP:

DEP RWY 07 - After take off turn left to intercept RDL 306 to ITUPA and climb to cleared level.
MNM rate of climb 270 FT/NM.

ITUPA 1J DEP:

DEP RWY 33 - After take off climb on RDL 326 to 7000 FT, then turn left to intercept RDL 306 to ITUPA and climb to cleared level.
MNM rate of climb 250 FT/NM.

ITUPA 1L DEP:

DEP RWY 15 - After take off turn right climb on RDL 200 to 5500 FT, then turn right to intercept RDL 306 to ITUPA and climb to cleared level.