

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO

TRANSITION ALTITUDE
11000 FT



TWR 118.100, 119.400
121.900
ATIS 128.450

ZAHEDAN
RWY 35L/R, 17L/R
PIRAN 1J/1H
LUDAX 1J/1H

ALL DIRECTIONS ARE MAGNETIC.
LEVEL AND ELEVATIONS ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.

CTR and ATZ class "D".

N
VAR 2°E
NOT TO SCALE

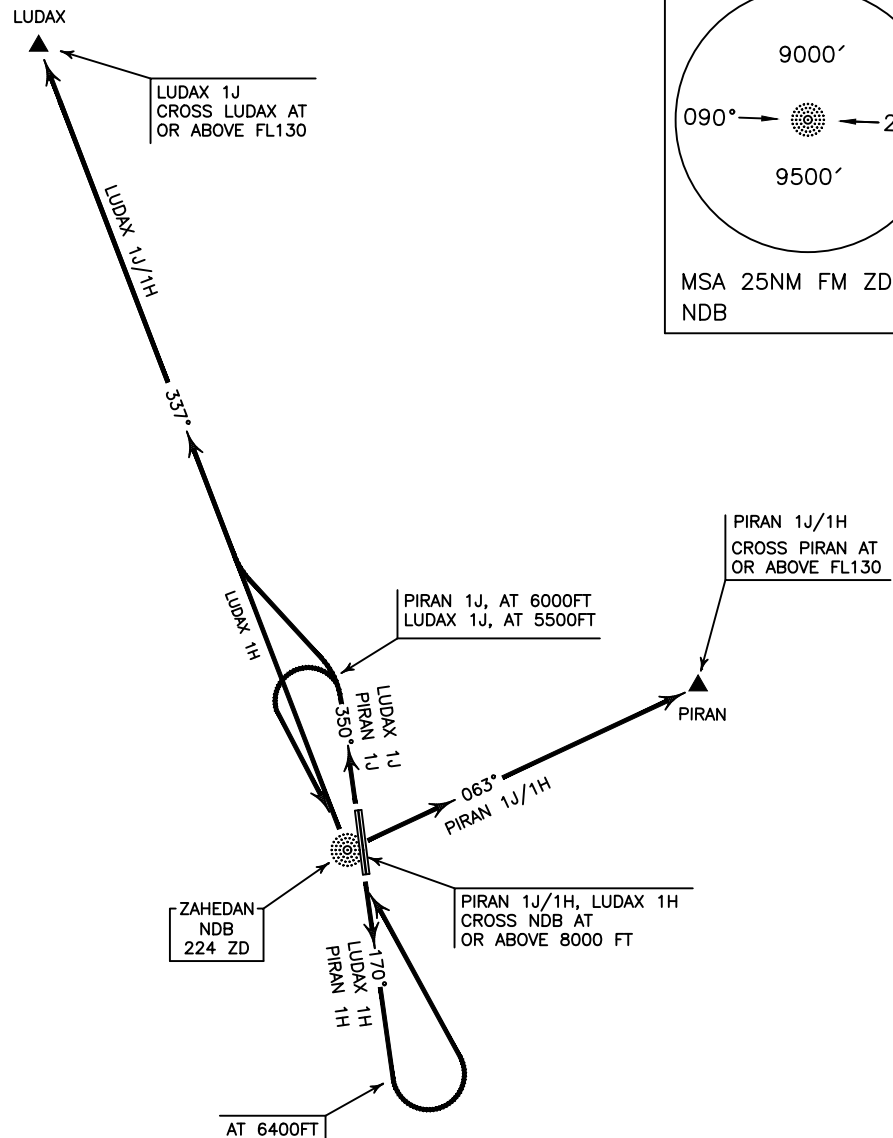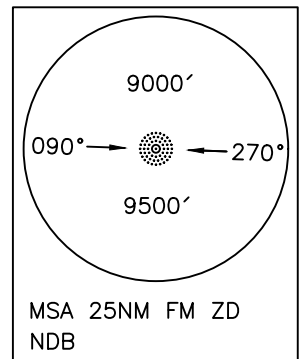

PIRAN 1J DEP:

DEP RWY 35L/R – After take off climb on TR 350° MAG to 6000 FT, then turn left to cross overhead ZD NDB at or above 8000 FT, then intercept BRG 063° to cross PIRAN at or above FL 130 and climb to cleared level.
MNM rate of climb 320 FT/NM. Turn below 6000 FT is not authorized.

PIRAN 1H DEP:

DEP RWY 17L/R – After take off climb on TR 170° MAG to 6400 FT, then turn left to cross overhead ZD NDB at or above 8000 FT, then turn right to intercept BRG 063° to cross PIRAN at or above FL 130 and climb to cleared level.
MNM rate of climb 260 FT/NM up to overhead ZD NDB. Turn below 6400 FT is not authorized.

LUDAX 1J DEP:

DEP RWY 35L/R – After take off climb on TR 350° MAG to 5500 FT, then turn left to intercept BRG 337° to cross LUDAX at or above FL 130 and climb to cleared level.

LUDAX 1H DEP:

DEP RWY 17L/R – After take off climb on TR 170° MAG to 6400 FT, then turn left to cross overhead ZD NDB at or above 8000 FT, then intercept BRG 337° to LUDAX and climb to cleared level.
MNM rate of climb 260 FT/NM up to overhead ZD NDB. Turn below 6400 FT is not authorized.