
ISLAMIC REPUBLIC OF IRAN

STANDARD DEPARTURE CHART-INSTRUMENT (SID)-ICAO

TRANSITION ALTITUDE 8000 FT APP 127.300 RADAR 127.300 TWR 118.100, 121.900 GND 121.700 ATIS 126.400 MASHHAD/ SHAHID HASHEMI NEJAD RWY 13L/R, 31R/L PAMTU 1A/1B/1C/1D

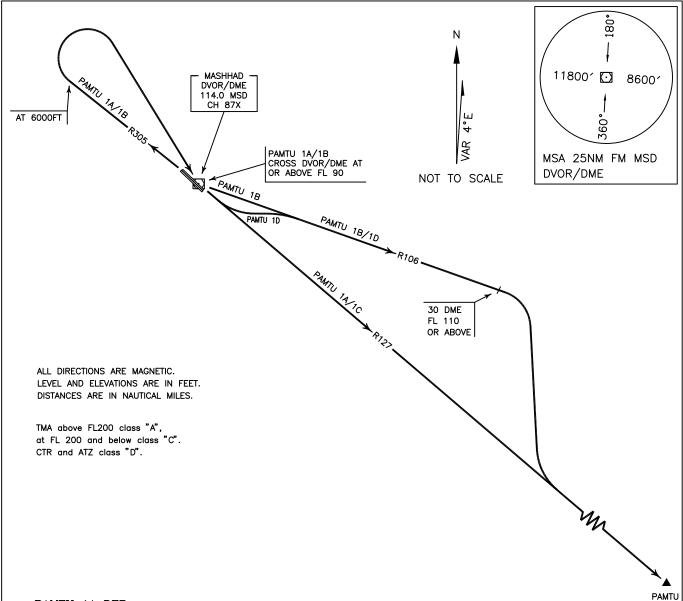

PAMTU 1A DEP:

DEP RWY 31R/L - After take off climb on RDL 305 to 6000 FT, then turn right to cross overhead MSD DVOR/DME at or above FL 90, then intercept RDL 127 to PAMTU and climb to cleared level. CAUTION: This procedure is not usable when OID35, OID76, OIC78 activated.

PAMTU 1B DEP:

DEP RWY 31R/L - After take off climb on RDL 305 to 6000 FT, then turn right to cross overhead MSD DVOR/DME at or above FL 90, then intercept RDL 106 to FL 110 or above, beyond 30 DME turn right to establish RDL 127 to PAMTU and climb to cleared level.

CAUTION: This procedure is not usable when OIC78 activated.

PAMTU 1C DEP:

DEP RWY 13R/L - After take off climb on RDL 127 to PAMTU and climb to cleared level. MNM rate of climb 270 FT/NM.

CAUTION: This procedure is not usable when OID35, OID76, OIC78 activated.

PAMTU 1D DEP:

DEP RWY 13R/L - After take off turn left climb on RDL 106 to FL 110 or above, beyond 30 DME turn right to establish RDL 127 to PAMTU and climb to cleared level.

MNM rate of climb 270 FT/NM.

CAUTION: This procedure is not usable when OIC78 activated.