
ISLAMIC REPUBLIC OF IRAN

STANDARD DEPARTURE CHART-INSTRUMENT (SID)-ICAO

TRANSITION ALTITUDE 8000 FT

127.300 ΔPP RADAR 127.300 **TWR** 118.100, 121.900 GND 121,700 **ATIS** 126,400

MASHHAD/ SHAHID HASHEMI NEJAD RWY 13L/R, 31R/L PAMTU 1F/1G/1H/1J

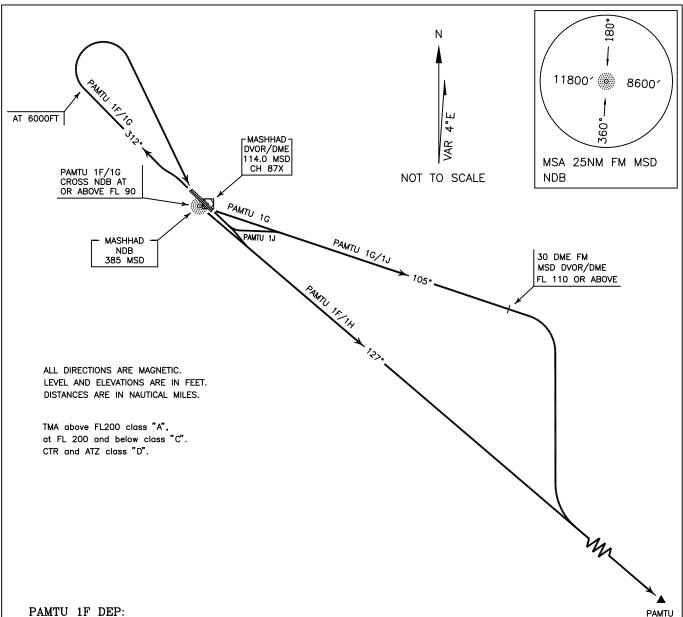

## PAMTU 1F DEP:

DEP RWY 31R/L - After take off climb on BRG 312° MAG to 6000 FT, then turn right to cross overhead MSD NDB at or above FL 90, then intercept BRG 127° MAG to PAMTU and climb to cleared level. CAUTION: This procedure is not usable when OID35, OID76, OIC78 activated.

## PAMTU 1G DEP:

DEP RWY 31R/L - After take off climb on BRG 312° MAG to 6000 FT, then turn right to cross overhead MSD NDB at or above FL 90, then turn left to intercept BRG 105° MAG to FL 110 or above, beyond 30 DME FM MSD DVOR/DME turn right to intercept BRG 127° MAG to PAMTU and climb to cleared level. CAUTION: This procedure is not usable when OIC78 activated.

## PAMTU 1H DEP:

DEP RWY 13R/L - After take off turn right climb on BRG 127° MAG to PAMTU and climb to cleared level. MNM rate of climb 270 FT/NM.

CAUTION: This procedure is not usable when OID35, OID76, OIC78 activated.

## PAMTU 1J DEP:

DEP RWY 13R/L - After take off climb on BRG 105° MAG to FL 110 or above, beyond 30 DME FM MSD DVOR/DME turn right to intercept BRG 127° MAG to PAMTU and climb to cleared level. MNM rate of climb 270 FT/NM.

CAUTION: This procedure is not usable when OIC78 activated.