

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO


TRANSITION ALTITUDE
13000 FT

TWR 118.500
121.700

SHAHRE KORD/SHAHRE KORD
RWY 14/32
ESFAHAN 1C/1D
LOXAK 1C/1D

ALL DIRECTIONS ARE MAGNETIC.
LEVEL AND ELEVATIONS ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.

ATZ class "D".

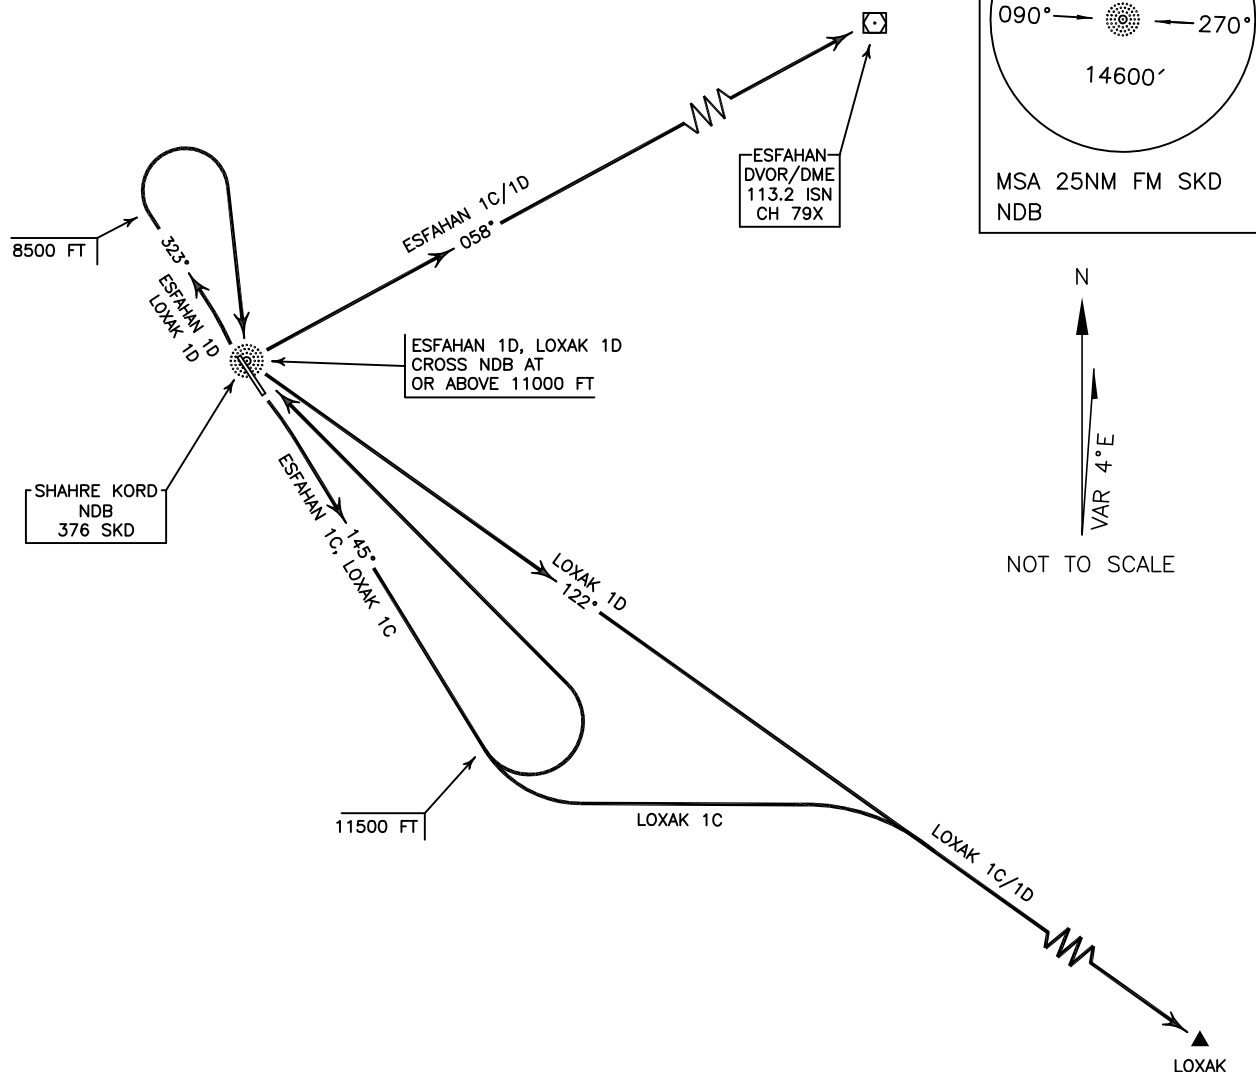

ESFAHAN 1C DEP:

DEP RWY 14 - After take off climb on BRG 145° to 11500 FT (MNM ROC 320 FT/NM and MAX IAS 250 KT), then turn left to cross overhead SKD NDB, then turn right to establish BRG 058° to ISN DVOR/DME and climb to cleared level.

ESFAHAN 1D DEP:

DEP RWY 32 - After take off climb on BRG 323° to 8500 FT, then turn right to cross overhead SKD NDB at or above 11000 FT, then turn left to establish BRG 058° to ISN DVOR/DME and climb to cleared level.

MNM ROC 300 FT/NM up to overhead SKD NDB.

LOXAK 1C DEP:

DEP RWY 14 - After take off climb on BRG 145° to 11500 FT, then turn left to establish BRG 122° to LOXAK and climb to cleared level.

MNM ROC 320 FT/NM.

LOXAK 1D DEP:

DEP RWY 32 - After take off climb on BRG 323° to 8500 FT, then turn right to cross overhead SKD NDB at or above 11000 FT, then establish BRG 122° to LOXAK and climb to cleared level.

MNM ROC 300 FT/NM up to overhead SKD NDB.