

STANDARD ARRIVAL CHART-  
INSTRUMENT (STAR)-ICAO

TRANSITION ALTITUDE  
12000 FT



|       |                  |
|-------|------------------|
| RADAR | 127.300          |
| APP   | 127.300          |
| TWR   | 118.100, 121.900 |
| GND   | 121.700          |
| ATIS  | 126.400          |

MASHHAD/SHAHID HASHEMI NEJAD  
RWY 13L/31R  
ALMUX 1N/1P/1Q

ALL DIRECTIONS ARE MAGNETIC.  
LEVEL AND ELEVATIONS ARE IN FEET.  
DISTANCES ARE IN NAUTICAL MILES.

TMA above FL200 class "A",  
at FL 200 and below class "C".  
CTR and ATZ class "D".

N  
VAR 4°E  
NOT TO SCALE

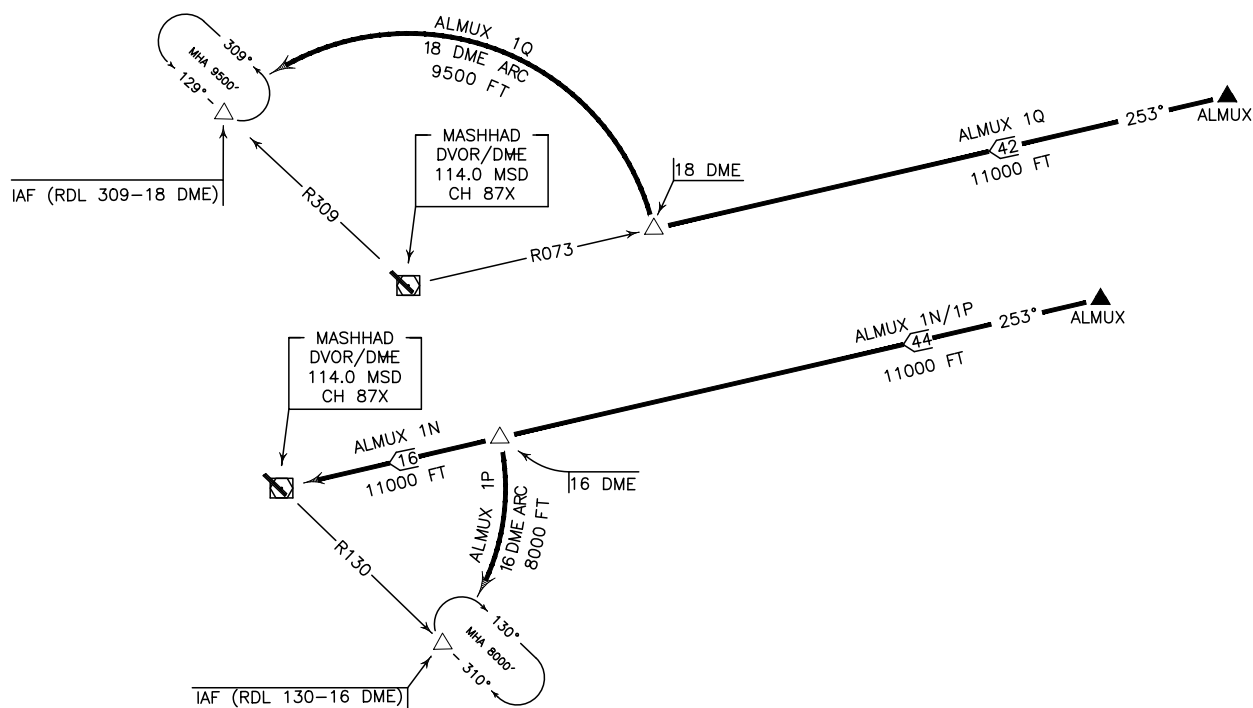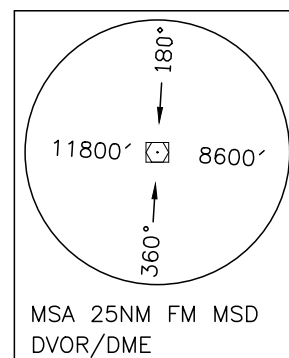

ALMUX 1N ARR:

FM ALMUX proceed to MSD DVOR/DME, MAG TR 253°, DIST 60 NM, MNM ALT 11000 FT.

ALMUX 1P ARR:

FM ALMUX proceed to MSD DVOR/DME, MAG TR 253°, DIST 44 NM, MNM ALT 11000 FT, at 16 DME turn left for 16 DME ARC to IAF (RDL 130-16 DME), MNM ALT 8000 FT.

ALMUX 1Q ARR:

FM ALMUX proceed to MSD DVOR/DME, MAG TR 253°, DIST 42 NM, MNM ALT 11000 FT, at 18 DME turn right for 18 DME ARC to IAF (RDL 309-18 DME), MNM ALT 9500 FT.