

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO



TRANSITION ALTITUDE
12000 FT

TWR 118.150, 121.900
ATIS 126.650

ARDABIL
RWY 07/25
EGVON 1G/1H
ITUPA 1G/1H

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.

ATZ class "D".

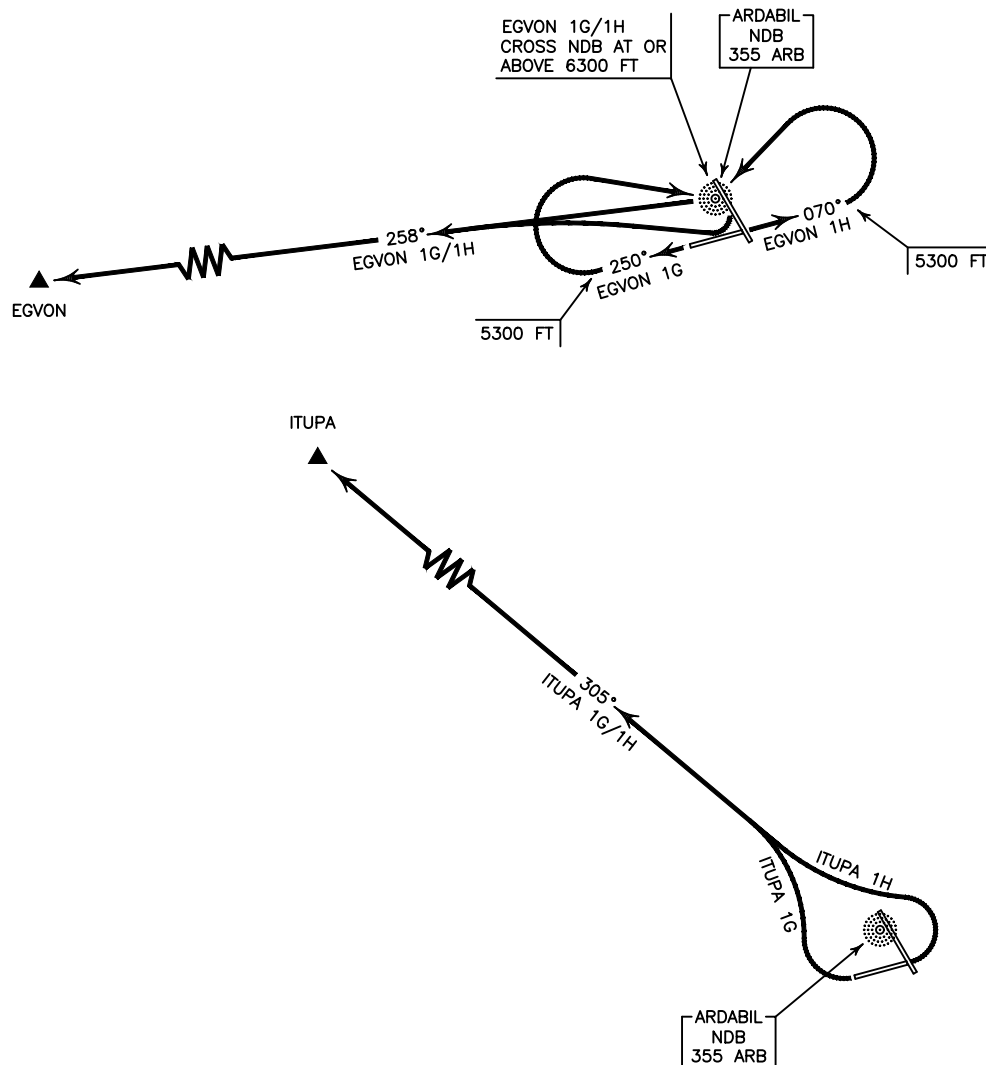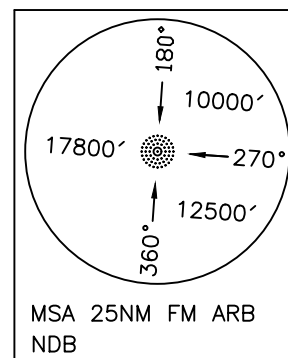

N
VAR 6°E
NOT TO SCALE

EGVON 1G DEP:

DEP RWY 25 - After take off climb on TR 250° MAG to 5300 FT, then turn right to cross overhead NDB at or above 6300 FT, then turn right to intercept BRG 258° to EGVON and climb to cleared level.
MNM rate of climb 400 FT/NM up to FL 200.

EGVON 1H DEP:

DEP RWY 07 - After take off climb on TR 070° MAG to 5300 FT, then turn left to cross overhead NDB at or above 6300 FT, then turn right to intercept BRG 258° to EGVON and climb to cleared level.
MNM rate of climb 400 FT/NM up to FL 200.

ITUPA 1G DEP:

DEP RWY 25 - After take off turn right to intercept BRG 305° to ITUPA and climb to cleared level.
MNM rate of climb 270 FT/NM.

ITUPA 1H DEP:

DEP RWY 07 - After take off turn left to intercept BRG 305° to ITUPA and climb to cleared level.
MNM rate of climb 270 FT/NM.