


STANDARD DEPARTURE CHART—
INSTRUMENT (SID)—ICAO

TRANSITION ALTITUDE
10000 FT

TWR 118.250
121.900
ATIS 127.250

UROMIYEH
RWY 03/21
ROVON 1C/1D/1G/1H

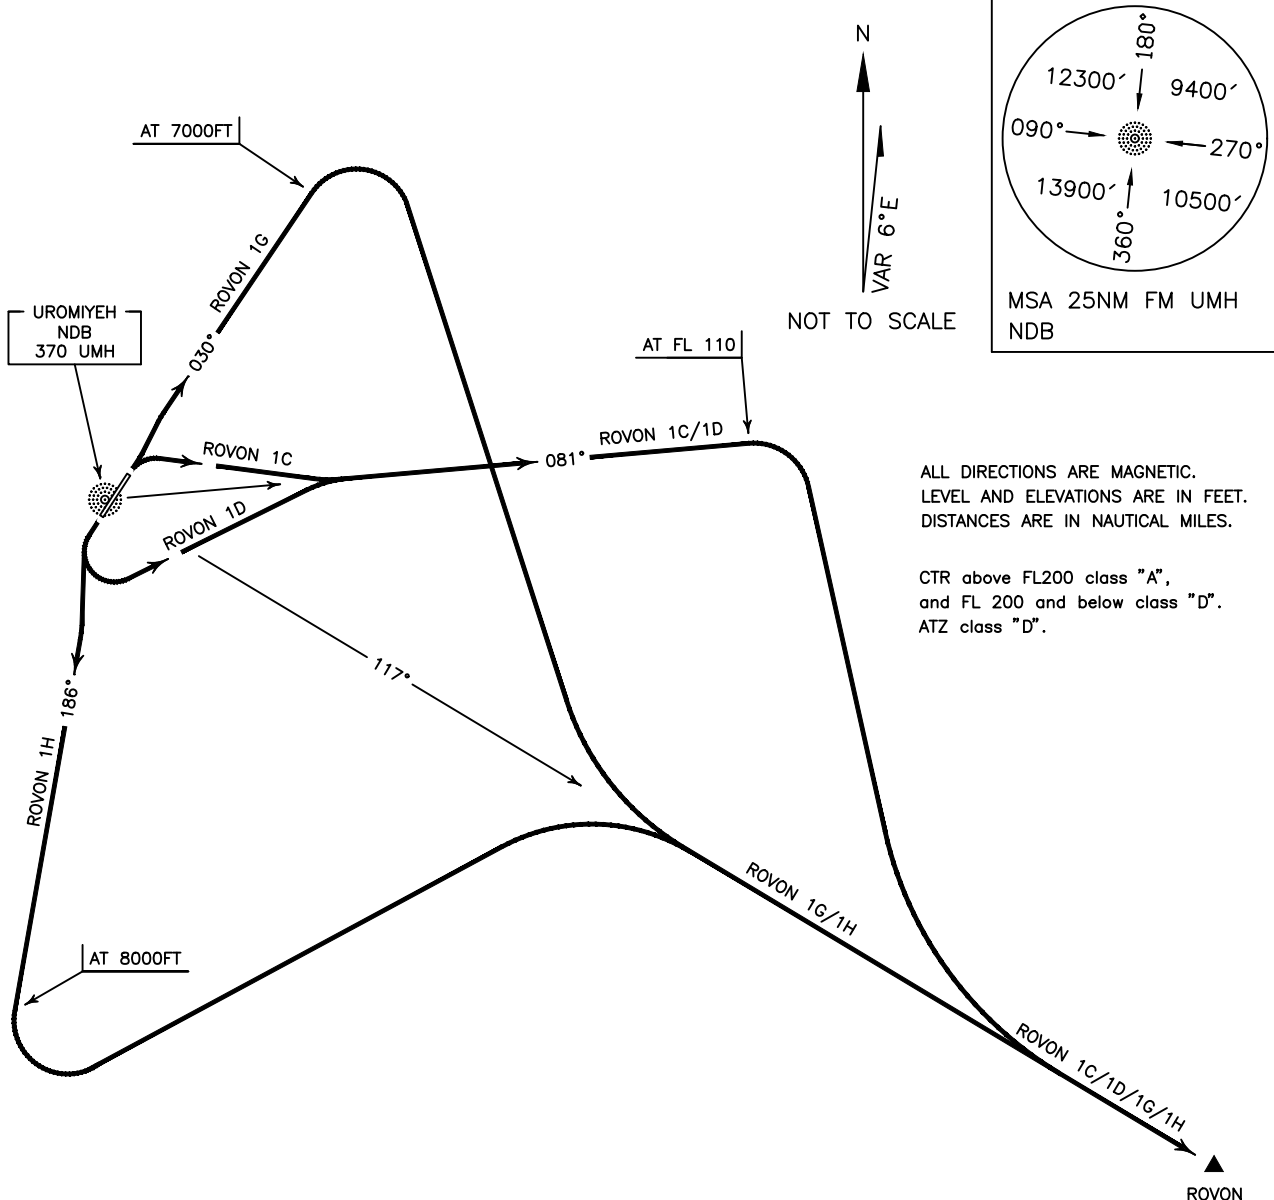

ROVON 1C DEP:

DEP RWY 03 – After take off turn right climb on BRG 081° to FL 110, then turn right to establish on BRG 117° to ROVON and climb to cleared level.
MNM rate of climb 300 FT/NM up to FL 110.

ROVON 1D DEP:

DEP RWY 21 – After take off turn left climb on BRG 081° to FL 110, then turn right to establish on BRG 117° to ROVON and climb to cleared level.
MNM rate of climb 320 FT/NM up to FL 110.
MAX IAS 210 KT up to intercept BRG 117°.

ROVON 1G DEP:

DEP RWY 03 – After take off climb on BRG 030° to 7000 FT, then turn right to establish on BRG 117° to ROVON and climb to cleared level.
MNM rate of climb 250 FT/NM up to FL 130.

ROVON 1H DEP:

DEP RWY 21 – After take off turn left climb on BRG 186° to 8000 FT, then turn left to establish on BRG 117° to ROVON and climb to cleared level.
MNM rate of climb 300 FT/NM up to FL 130.