


STANDARD ARRIVAL CHART-
INSTRUMENT (STAR)-ICAO

TRANSITION ALTITUDE
11000 FT

TWR 122.900, 121.900
ATIS 128.450

SANANDAJ
RWY 01/19
LOVID 1N/1P, ASLAX 1N
BOPEL 1N

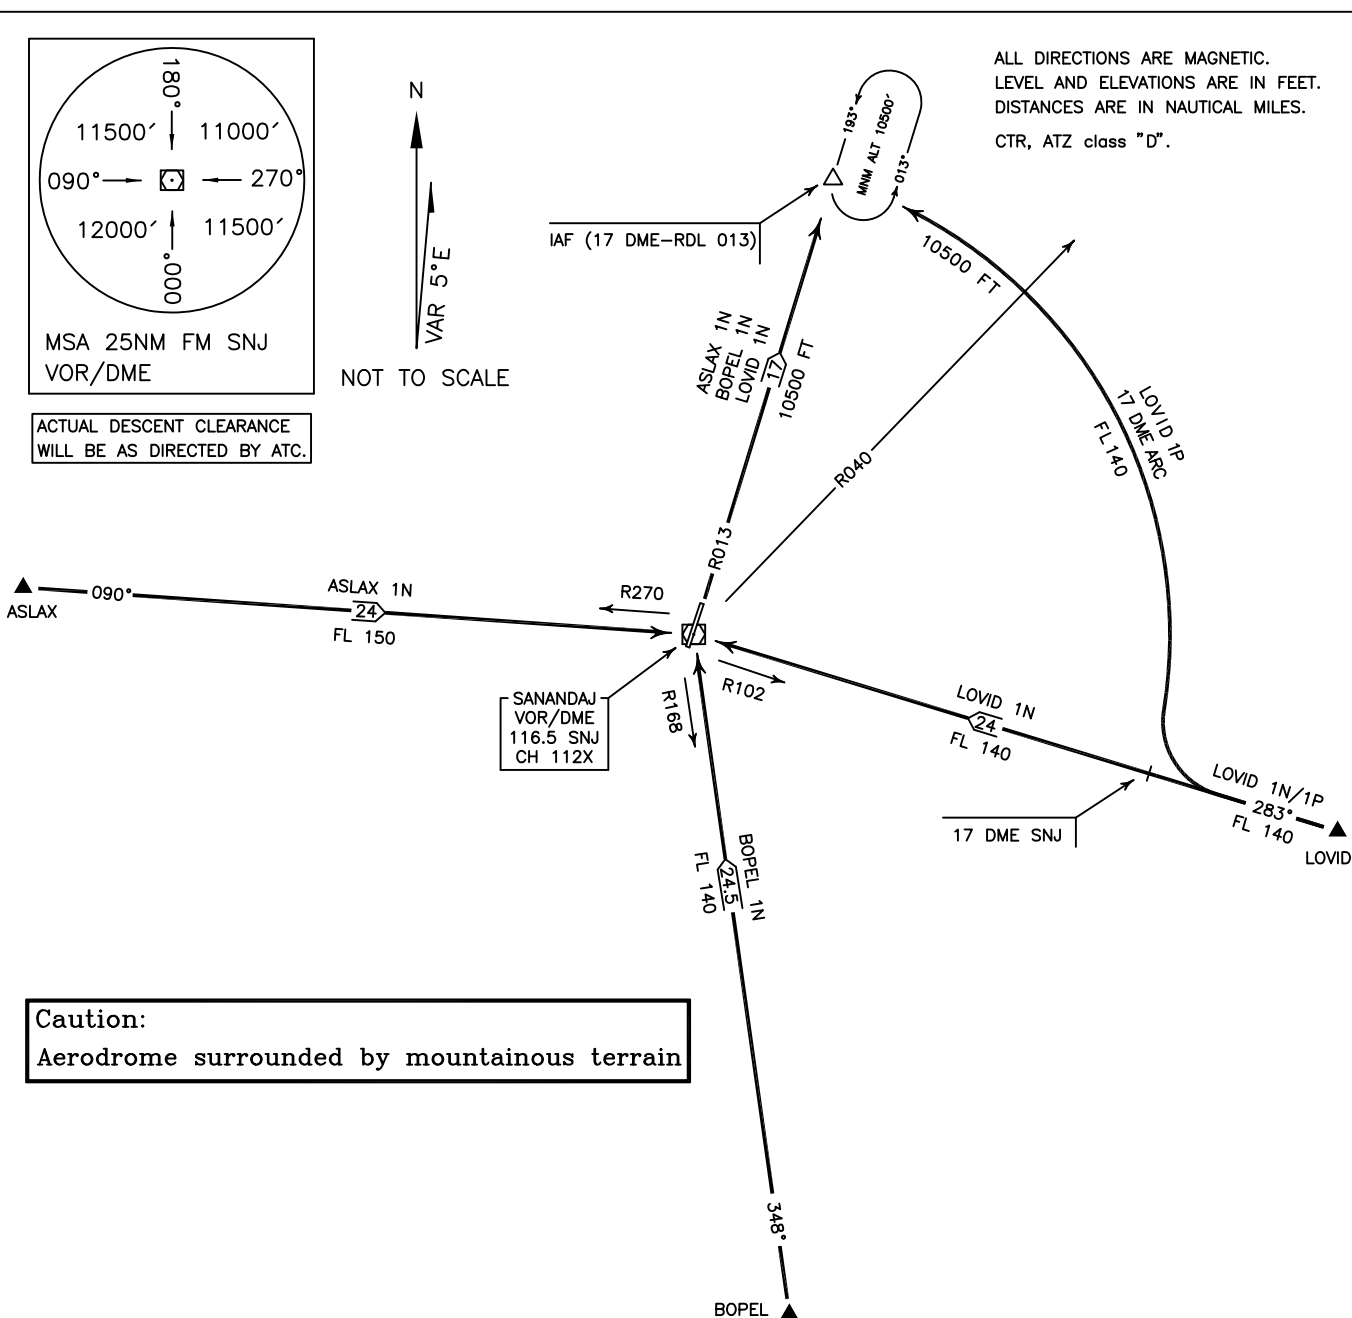

LOVID 1N ARR:

FM LOVID proceed to IAF (17 DME -RDL 013), via overhead SNJ VOR/DME, MAG TR 283°, DIST 24 NM, MNM FL 140, then intercept RDL 013, DIST 17 NM, MNM ALT 10500 FT.

LOVID 1P ARR:

FM LOVID proceed to IAF (17 DME -RDL 013), MAG TR 283°, MNM FL 140, at 17 DME turn right for 17 DME Arc to IAF, after crossing RDL 040 MNM ALT 10500 FT.

BOPEL 1N ARR:

FM BOPEL proceed to IAF (17 DME -RDL 013), via overhead SNJ VOR/DME, MAG TR 348°, DIST 24.5 NM, MNM FL 140, then intercept RDL 013, DIST 17 NM, MNM ALT 10500 FT.

ASLAX 1N ARR:

FM ASLAX proceed to IAF (17 DME -RDL 013), via overhead SNJ VOR/DME, MAG TR 090°, DIST 24 NM, MNM FL 150, then intercept RDL 013 to IAF, DIST 17 NM, MNM ALT 10500 FT.