

STANDARD DEPARTURE CHART-
INSTRUMENT (SID)-ICAO


TRANSITION ALTITUDE
13000 FT

APP 124.600
RADAR 124.600
TWR 118.300
GND 121.900
ATIS 128.250

ESFAHAN/SHAHID BEHESHTI
RWY 25R/L 07L/R
LABOT 3C/3D, LADAL 3C/3D
GESIP 1C/1D

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.

TMA above FL200 class "A",
at FL 200 and below class "C".
CTR AND ATZ class "D".

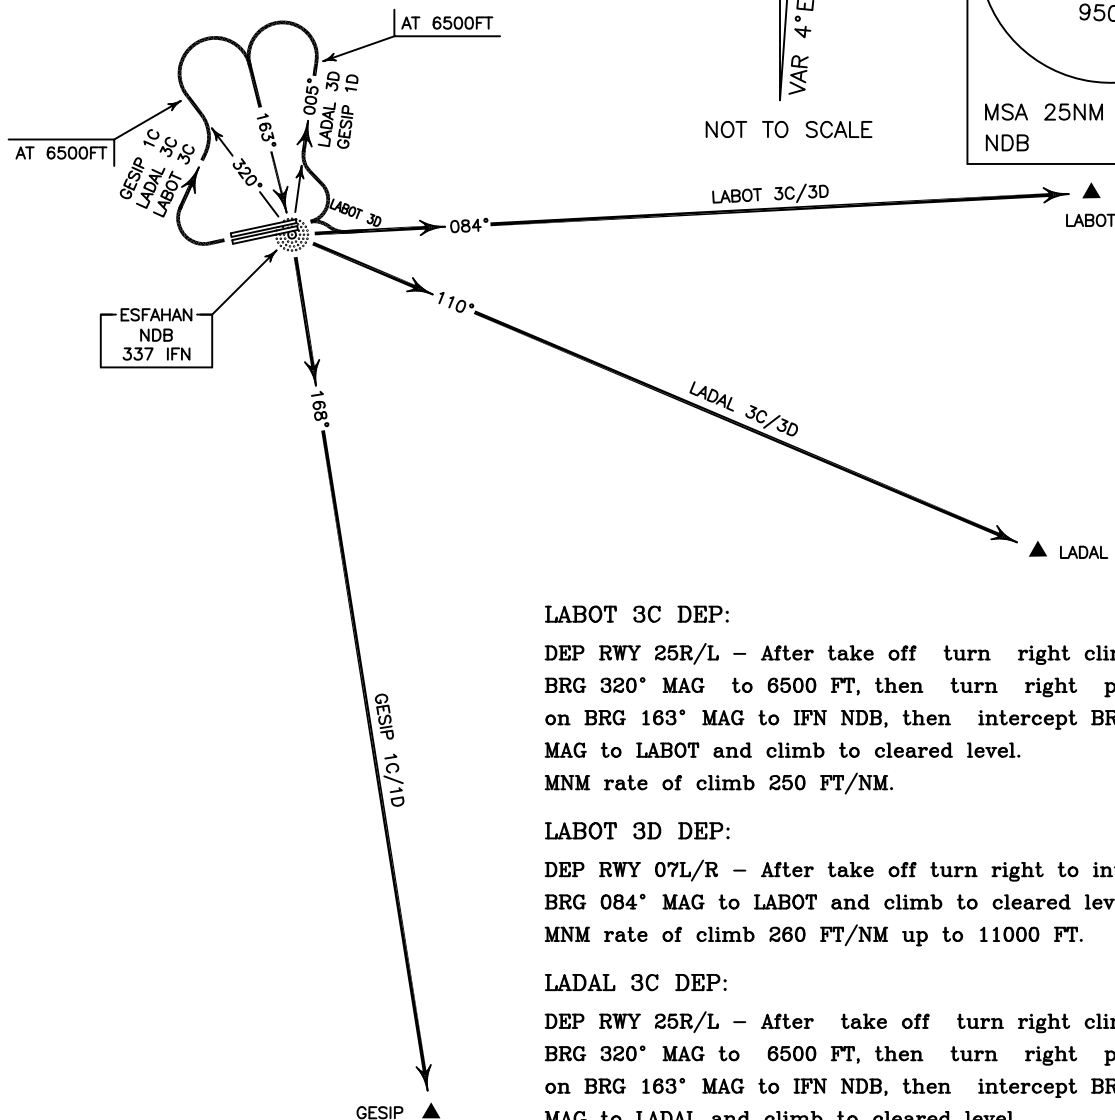

LABOT 3C DEP:

DEP RWY 25R/L - After take off turn right climb on BRG 320° MAG to 6500 FT, then turn right proceed on BRG 163° MAG to IFN NDB, then intercept BRG 084° MAG to LABOT and climb to cleared level.
MNM rate of climb 250 FT/NM.

LABOT 3D DEP:

DEP RWY 07L/R - After take off turn right to intercept BRG 084° MAG to LABOT and climb to cleared level.
MNM rate of climb 260 FT/NM up to 11000 FT.

LADAL 3C DEP:

DEP RWY 25R/L - After take off turn right climb on BRG 320° MAG to 6500 FT, then turn right proceed on BRG 163° MAG to IFN NDB, then intercept BRG 110° MAG to LADAL and climb to cleared level.
MNM rate of climb 250 FT/NM.

LADAL 3D DEP:

DEP RWY 07L/R - After take off turn left climb on BRG 005° MAG to 6500 FT, then turn left proceed on BRG 163° MAG to IFN NDB, then intercept BRG 110° to LADAL and climb to cleared level.
MNM rate of climb 250 FT/NM.

GESIP 1C DEP:

DEP RWY 25R/L - After take off turn right climb on BRG 320° MAG to 6500 FT, then turn right proceed on BRG 163° MAG to IFN NDB, then intercept BRG 168° to GESIP and climb to cleared level.
MNM rate of climb 250 FT/NM.

GESIP 1D DEP:

DEP RWY 07L/R - After take off turn left climb on BRG 005° MAG to 6500 FT, then turn left proceed on BRG 163° MAG to IFN NDB, then intercept BRG 168° to GESIP and climb to cleared level.
MNM rate of climb 250 FT/NM.