

STANDARD ARRIVAL CHART-
INSTRUMENT (STAR)-ICAO

TRANSITION LEVEL
FL 110
TRANSITION ALTITUDE
9000 FT

RADAR	125.100, 119.700, 124.450
APP	125.100, 119.700, 124.450
TWR	118.100
GND	121.700, 121.900
ATIS	128.000

TEHRAN/MEHRABAD
RWY 29L/R
MUXOR 1S, RADAL 1S
BOXAM 1S


SPEED RESTRICTION

Within TMA: MAX 270 KT IAS


Within CTR: MAX 230 KT IAS

ALL DIRECTIONS ARE MAGNETIC,
LEVEL AND ELEVATIONS ARE IN FEET,
DISTANCES ARE IN NAUTICAL MILES.

TMA above FL200 class "A",
at FL 200 and below class "C".
CTR and ATZ class "D".



ACTUAL DESCENT CLEARANCE
WILL BE AS DIRECTED BY ATC.

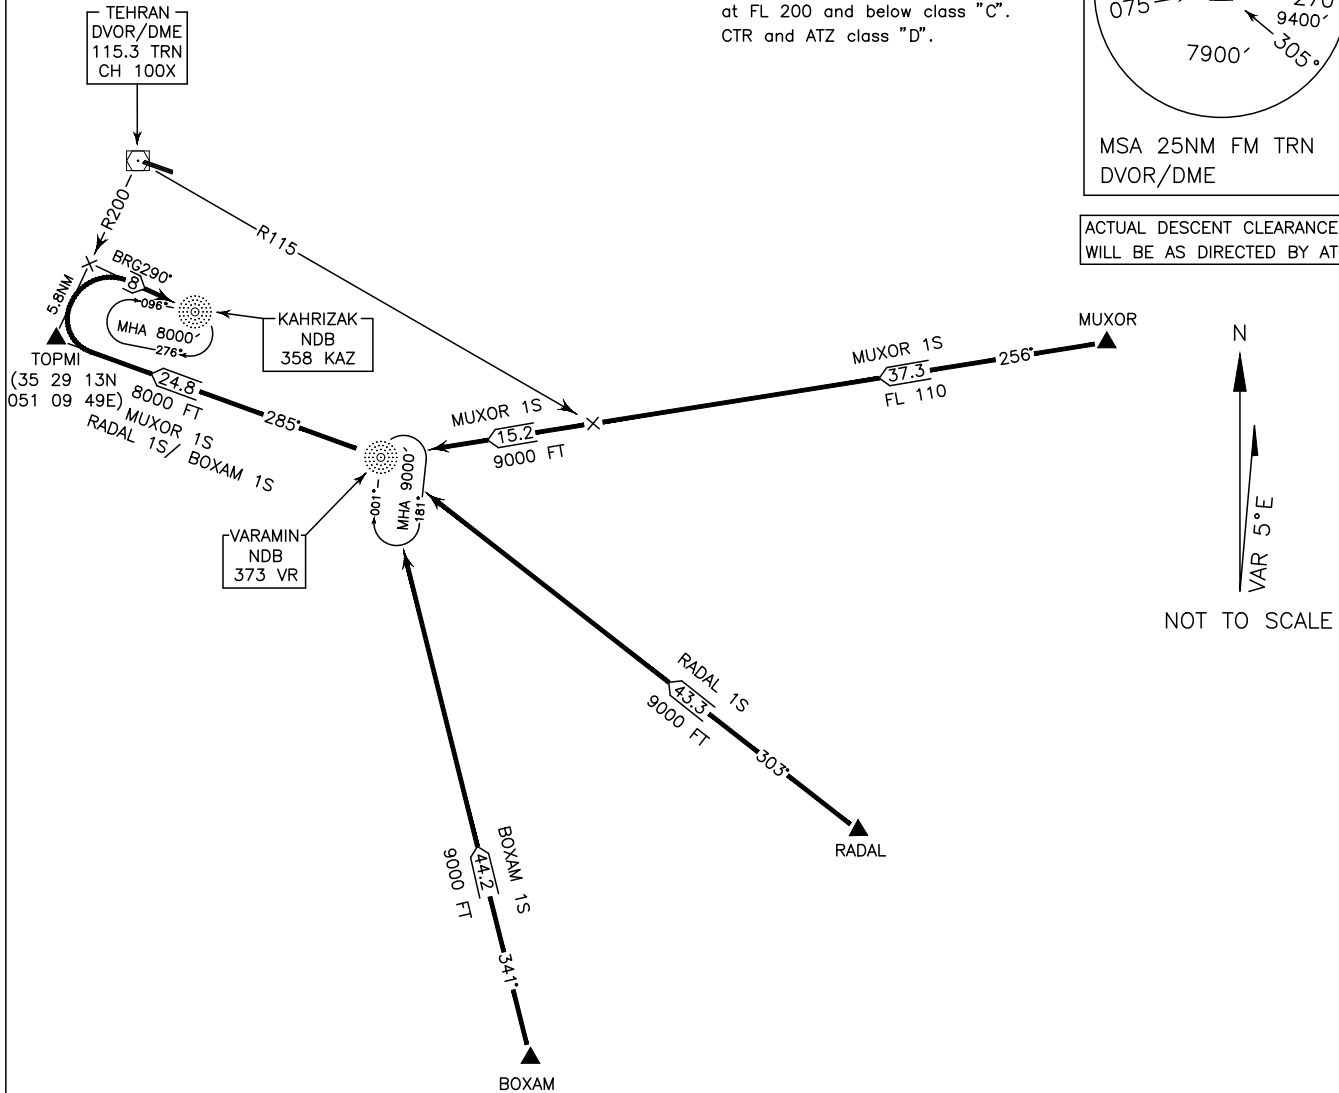

MUXOR 1S ARR:

FM MUXOR proceed to VR NDB, MAG TR 256° DIST 37.3 NM, MNM level FL 110, after crossing RDL 115 DIST to VR NDB 15.2 NM, MNM ALT 9000 FT. then establish BRG 285° FM VR NDB to TOPMI, DIST 24.8 NM, MNM ALT 8000 FT. then turn right proceed on RDL 200 FM TRN DVOR/DME to established BRG 290° FM KAZ NDB DIST 5.8 NM, MNM ALT 8000 FT. then proceed to KAZ NDB on BRG 290, DIST 8 NM, MNM ALT 8000 FT.

RADAL 1S ARR:

FM RADAL proceed to VR NDB, MAG TR 303°, DIST 43.3 NM, MNM level 9000 FT, then establish BRG 285° FM VR NDB to TOPMI, DIST 24.8 NM, MNM ALT 8000 FT. Then turn right proceed on RDL 200 FM TRN DVOR/DME to established BRG 290° FM KAZ NDB DIST 5.8 NM, MNM ALT 8000 FT, then proceed to KAZ NDB on BRG 290, DIST 8 NM, MNM ALT 8000 FT.

BOXAM 1S ARR:

FM BOXAM proceed to VR NDB, MAG TR 341° DIST 44.2 NM, MNM ALT 9000 FT, then establish BRG 285° FM VR NDB to TOPMI, DIST 24.8 NM, MNM ALT 8000 FT. Then turn right proceed on RDL 200 FM TRN DVOR/DME to established BRG 290° FM KAZ NDB DIST 5.8 NM, then proceed to KAZ NDB on BRG 290, DIST 8 NM, MNM ALT 8000 FT. MNM ALT 8000 FT.